

Description


panel thickness 0.250", thread: 6-32, brass, MS33737 series nut

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	MS3373713C
Minimum Qty (MOQ):	10
NSN:	5310-00-875-9664
ECCN:	EAR99
National Motor Freight:	093460, Bolts / Nuts Noi Bbc / Zinc

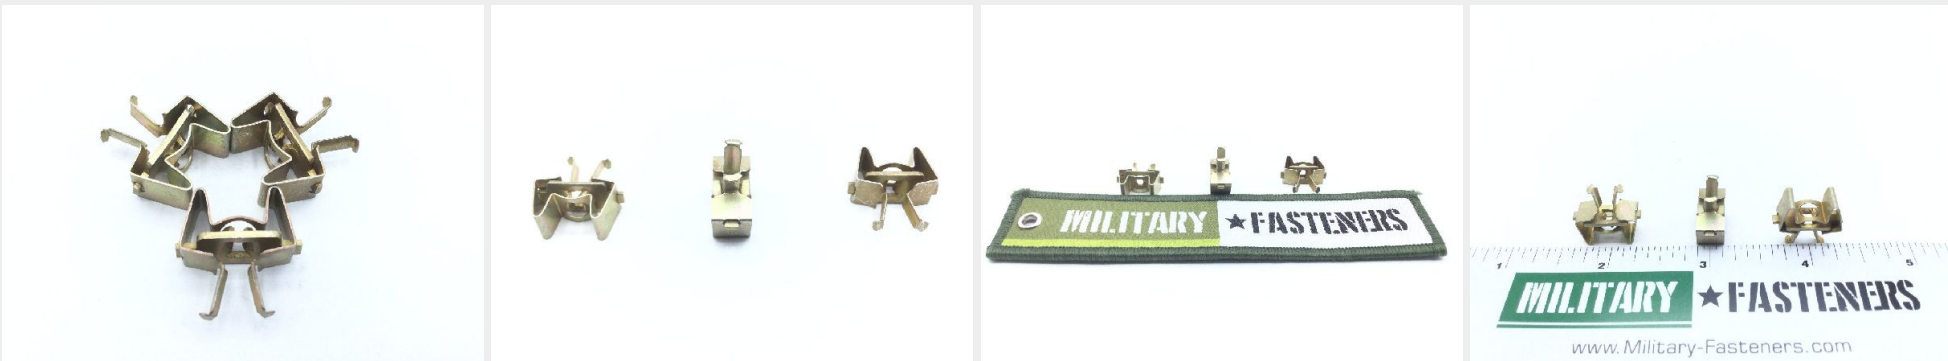

* See page 2 for technical characteristics

P/N MS33737-13C Specifications

Material Thickness:	0.002 Inches Minimum And 0.022 Inches Maximum
Mating Member Diameter Accommodated:	0.138 Inches Nominal
Nut Style:	Sheet Spring
Nut Length:	0.661 Inches Minimum And 0.681 Inches Maximum
Nut Height:	0.615 Inches Minimum And 0.635 Inches Maximum
Nut Width:	0.271 Inches Minimum And 0.291 Inches Maximum
Panel Thickness:	0.240 Inches Minimum And 0.260 Inches Maximum
Nut Mounting Provision:	Gripping Prongs
Gripping Prong Quantity:	2
Gripping Prong Length:	0.272 Inches Minimum And 0.292 Inches Maximum
Material:	Copper Alloy Overall
Surface Treatment:	Cadmium Overall Or Zinc Overall And Chromate Overall Or Zinc Overall And Phosphate Overall
Surface Treatment Document And Classification:	Qq-p-416,type 1,class 2 Fed Spec 1st Treatment Response Overall Or Qq-z-325 Fed Spec 2nd Treatment Response Overall Or Qq-z-325 Fed Spec 3rd Treatment Response Overall Or Qq-z-325 Fed Spec 4th Treatment Response Overall Or Qq-z-325 Fed Spec 5th Treatment Response Overall

How to Order

Order this sheet spring nut from our inventory online by visiting <https://military-fasteners.com/nuts/sheet+spring+nuts/MS33737-13C> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.