

**Description**


panel thickness 0.375", thread: 6-32, brass, clip, MS33737 series nut

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information**

SKU / Model:	MS3373715C
Minimum Qty (MOQ):	10
NSN:	5310-01-420-7611
Schedule B:	7415.33.8010
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

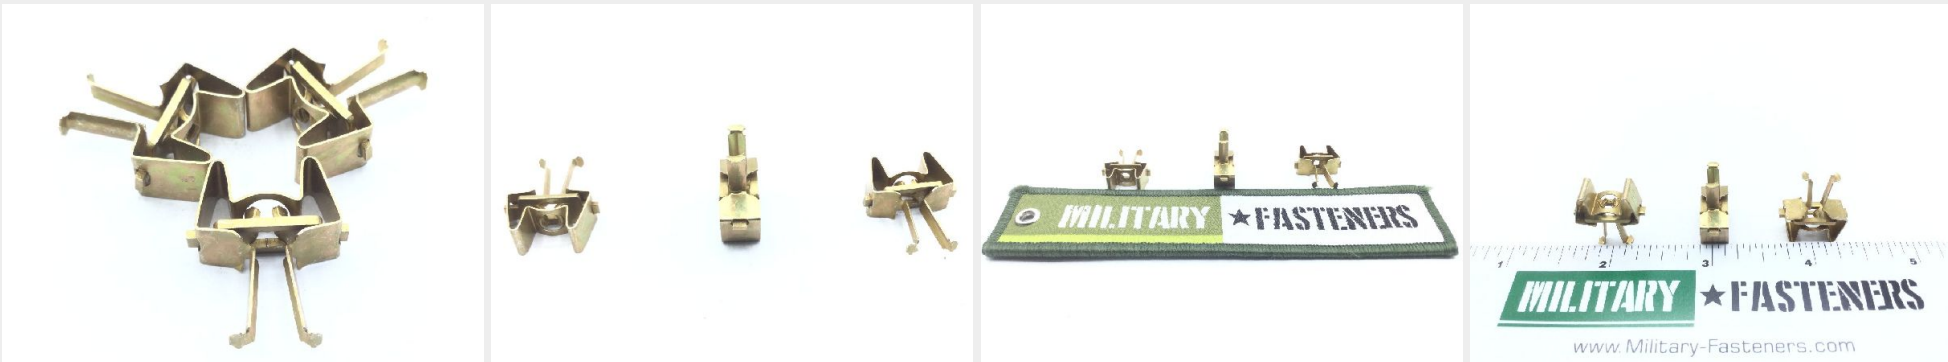

\* See page 2 for technical characteristics

## P/N MS33737-15C Specifications

<b>Material Thickness:</b>	0.012 Inches Nominal
<b>Mating Member Diameter Accommodated:</b>	0.138 Inches Nominal
<b>Nut Style:</b>	Sheet Spring
<b>Nut Length:</b>	0.661 Inches Minimum And 0.681 Inches Maximum
<b>Nut Height:</b>	0.740 Inches Minimum And 0.760 Inches Maximum
<b>Nut Width:</b>	0.271 Inches Minimum And 0.291 Inches Maximum
<b>Panel Thickness:</b>	0.365 Inches Minimum And 0.385 Inches Maximum
<b>Material:</b>	Copper Alloy 260 Nut
<b>Material:</b>	Copper Alloy 510 Shell Or Copper Alloy 524 Shell Or Copper Alloy 544 Shell
<b>Material Document And Classification:</b>	Astm B139 Assn Std Single Material Response Shell
<b>Material Document And Classification:</b>	Astm B36 Assn Std Single Material Response Nut
<b>Surface Treatment:</b>	Cadmium Overall And Chromate Overall
<b>Surface Treatment Document And Classification:</b>	Qq-p-416, Ty2, Cl2 Fed Spec Single Treatment Response Overall

## How to Order

Order this sheet spring nut from our inventory online by visiting <https://military-fasteners.com/nuts/sheet+spring+nuts/MS33737-15C> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.