

Description


Length: 9/16", Thread: 6-32, Thread Length: 15/64", pan head, washer and nut included, coarse thread, MS3498 series screw

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	MS34988
Minimum Qty (MOQ):	5
NSN:	5305-01-081-0753
Schedule B:	7616.10.9090
ECCN:	EAR99
National Motor Freight:	013680, Alum Screws

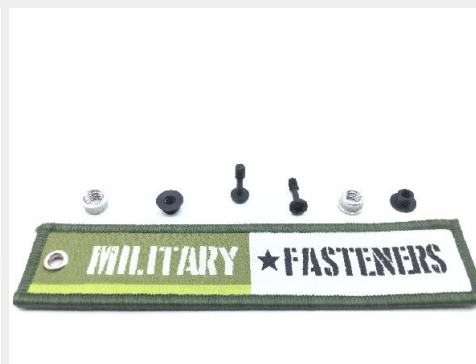

* See page 2 for technical characteristics

P/N MS3498-8 Specifications

Thread Class:	2a
Thread Direction:	Right-hand
Thread Length:	0.225 Inches Minimum And 0.235 Inches Maximum
Fastener Length:	0.563 Inches Nominal
Head Style:	Pan
Head Diameter:	0.260 Inches Minimum And 0.270 Inches Maximum
Head Height:	0.090 Inches Minimum And 0.110 Inches Maximum
Internal Drive Style:	Cross Recess Type 1
Nominal Thread Diameter:	0.138 Inches
Thread Quantity Per Inch:	32
Special Features:	Standoff Consist Of A Flange And Collar,stud Color Black No. 36231
Material:	Aluminum Alloy 2011 Stand-off
Material:	Steel Comp 303 Fastener
Material Document And Classification:	Ams 5640 Assn Std Single Material Response Fastener
Surface Treatment:	Anodize Stand-off
Surface Treatment:	Paint Fastener
Surface Treatment Document And Classification:	Mil-a-8625 Mil Spec Single Treatment Response Stand-off
Surface Treatment Document And Classification:	Mil-e-15090 Mil Spec Single Treatment Response Fastener
Thread Series Designator:	Unc

How to Order

Order this machine screw from our inventory online by visiting <https://military-fasteners.com/screws/machine+screws/MS3498-8> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.