

Description


Fastener Length: 3/16", Thread: 4-40, Thread Length: 9/64

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	MS35190220
Minimum Qty (MOQ):	100
NSN:	5305-00-957-6644
Schedule B:	7318.15.6080
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

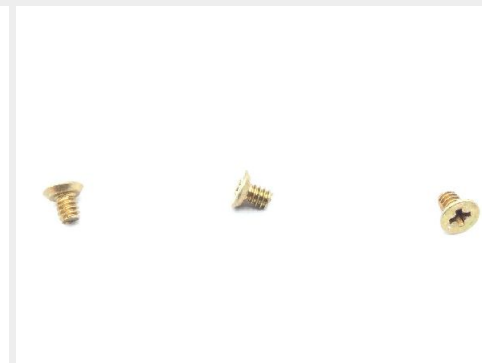

* See page 2 for technical characteristics

P/N MS35190-220 Specifications

Thread Class:	2a
Thread Direction:	Right-hand
Thread Length:	0.080 Inches Minimum And 0.150 Inches Maximum
Fastener Length:	0.157 Inches Minimum And 0.188 Inches Maximum
Head Style:	Flat Countersunk Undercut
Head Diameter:	0.195 Inches Minimum And 0.225 Inches Maximum
Head Height:	0.038 Inches Minimum And 0.047 Inches Maximum
Internal Drive Style:	Cross Recess Type 1
Nominal Thread Diameter:	0.112 Inches
Thread Quantity Per Inch:	40
Minimum Tensile Strength:	60000 Pounds Per Square Inch
Countersink Angle:	80.0 Degrees Minimum And 82.0 Degrees Maximum
Screw Material:	Steel
Screw Material Document And Classification:	66 Fed Std Single Material Response Or Astma108 Assn Std Single Material Response
Screw Surface Treatment:	Cadmium And Chromate
Screw Surface Treatment Document And Classification:	Qq-p-416,type 2 Class 3 Fed Spec Single Treatment Response Or Mil-c-81562,type 2 Class 3 Mil Spec Single Treatment Response
Thread Series Designator:	Unc
Nondefinitive Spec/std Data:	3 Type And 2c Style
Departure From Cited Designator:	As Modified By Material And Tensile Strength

How to Order

Order this machine screw from our inventory online by visiting <https://military-fasteners.com/screws/machine+screws/MS35190-220> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.