

Description


Fastener Length: 3/4", Thread: 6-40, Thread Length: 21/32

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

| | |
|-------------------------|---|
| SKU / Model: | MS35191241 |
| Minimum Qty (MOQ): | 25 |
| NSN: | 5305-00-922-3982 |
| ECCN: | EAR99 |
| National Motor Freight: | 093486, Bolts,nuts Or Screws, Noi (sub 3) |

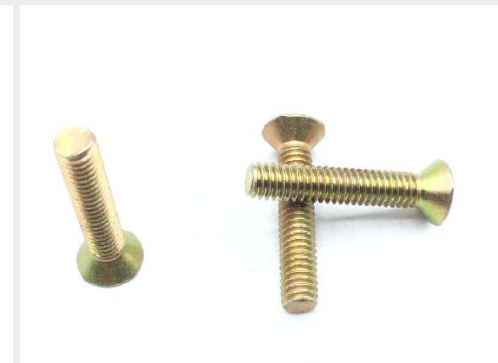

P/N MS35191-241 Specifications

| | |
|---|--|
| Thread Class: | 2a |
| Thread Direction: | Right-hand |
| Thread Length: | 0.586 Inches Minimum And 0.667 Inches Maximum |
| Fastener Length: | 0.719 Inches Minimum And 0.750 Inches Maximum |
| Head Style: | Flat Countersunk |
| Head Diameter: | 0.244 Inches Minimum And 0.279 Inches Maximum |
| Internal Drive Style: | Cross Recess Type 1 |
| Nominal Thread Diameter: | 0.138 Inches |
| Thread Quantity Per Inch: | 40 |
| Countersink Angle: | 80.0 Degrees Minimum And 82.0 Degrees Maximum |
| Screw Material: | Steel Comp 1010 Or Steel Comp 1011 Or Steel Comp 1013 |
| Screw Surface Treatment: | Cadmium And Chromate |
| Screw Surface Treatment Document And Classification: | Qq-p-416,type 2,class 3 Fed Spec All Treatment Responses |
| Thread Series Designator: | Unf |
| Nondefinitive Spec/std Data: | 3 Type And 2c Style |
| Departure From Cited Designator: | As Modified By Material |

How to Order

Order this machine screw from our inventory online by visiting <https://military-fasteners.com/screws/machine+screws/MS35191-241> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.