

Description

length: 1/2", thread: 8-32, pan head, cadmium plated carbon steel, coarse thread, MS35206 series screw


* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information**Alternate Part Numbers**

[AN515-8R8](#)

SKU / Model:	MS35206245
Minimum Qty (MOQ):	100
NSN:	5305-00-984-6193
Schedule B:	7318.15.4000
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

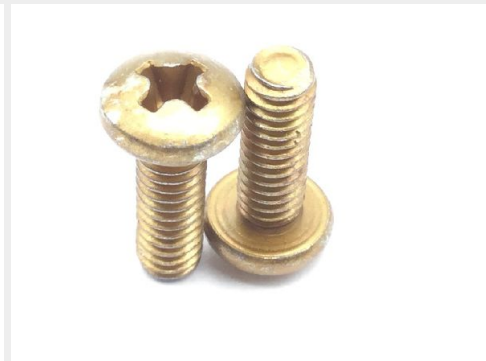

* See page 2 for technical characteristics

P/N MS35206-245 Specifications

Thread Class:	2a
Thread Direction:	Right-hand
Thread Length:	0.438 Inches Minimum And 0.500 Inches Maximum
Fastener Length:	0.500 Inches Nominal
Head Style:	Pan
Head Diameter:	0.306 Inches Minimum And 0.322 Inches Maximum
Head Height:	0.105 Inches Minimum And 0.115 Inches Maximum
Internal Drive Style:	Cross Recess Type 1
End Item Identification:	Nsn 4210-01-486-1035 Tfft (tactical Fire Fighting Truck)
Nominal Thread Diameter:	0.164 Inches
Thread Quantity Per Inch:	32
Minimum Tensile Strength:	60000 Pounds Per Square Inch
Screw Material:	Steel Comp 1010 Or Steel Comp 1011 Or Steel Comp 1013
Screw Material Document And Classification:	66 Fed Std All Material Responses
Screw Surface Treatment:	Cadmium And Chromate
Screw Surface Treatment Document And Classification:	Qq-p-416 Ty 2 Cl 3 Fed Spec Single Treatment Response
Thread Series Designator:	Unc
Nondefinitive Spec/std Data:	3 Type And 9c Style

How to Order

Order this machine screw from our inventory online by visiting <https://military-fasteners.com/screws/machine+screws/MS35206-245> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.