

Description



Fastener Length: 5/16", Thread: 4-48, Thread Length: 5/16", MS35207 series screw

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	MS35207214
Minimum Qty (MOQ):	25
NSN:	5305-00-958-0655
Schedule B:	7318.15.6080
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

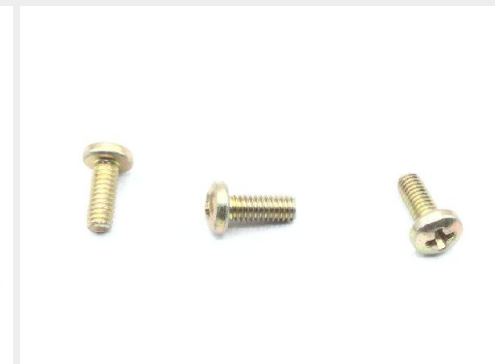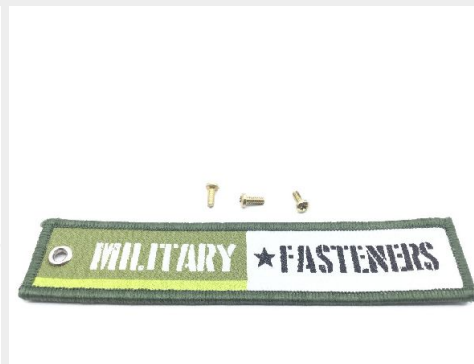

P/N MS35207-214 Specifications

Thread Class:	2a
Thread Direction:	Right-hand
Thread Length:	0.270 Inches Minimum And 0.312 Inches Maximum
Fastener Length:	0.281 Inches Minimum And 0.312 Inches Maximum
Head Style:	Pan
Head Diameter:	0.205 Inches Minimum And 0.219 Inches Maximum
Head Height:	0.070 Inches Minimum And 0.080 Inches Maximum
Internal Drive Style:	Cross Recess Type 1
End Item Identification:	Mortar, M-29 2350-01-277-5770
Nominal Thread Diameter:	0.112 Inches
Thread Quantity Per Inch:	48
Minimum Tensile Strength:	55000 Pounds Per Square Inch
Part Name Assigned By Controlling Agency:	Screw, Machine-pan Head, Cross Recessed, Carbon Steel, Cadmium Plated, Unf-2a
Screw Material:	Steel Comp 1010 Or Steel Comp 1011 Or Steel Comp 1013
Screw Material Document And Classification:	66 Fed Std All Material Responses
Screw Surface Treatment:	Cadmium And Chromate
Screw Surface Treatment Document And Classification:	Qq-p-416,ty 2,cl 3 Fed Spec Single Treatment Response
Thread Series Designator:	Unf
Specification/standard Data:	81348-fed-std-h28/20, System 21 Government Standard

How to Order

Order this machine screw from our inventory online by visiting <https://military-fasteners.com/screws/machine+screws/MS35207-214> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.