

## P/N MS35214-25

## **Description**

length: 3/8", thread: 6-32, pan head, black brass, coarse thread

\* Manufacturer certifications are shipped with your order FREE of charge

## Order this part online

#### **Additional Information**


SKU / Model: MS3521425

Minimum Qty (MOQ): 100

NSN: 5305-00-206-3716

ECCN: EAR99

National Motor Freight: 096630, Screws Noi Brass / Bronze / Copper

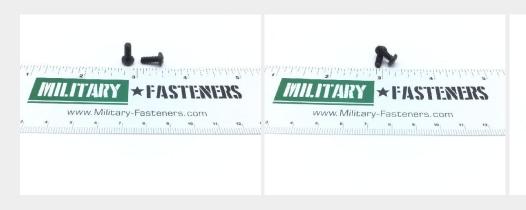





# P/N MS35214-25 Specifications

Thread Class:	2a
Thread Direction:	Right-hand
Thread Length:	0.313 Inches Minimum And 0.375 Inches Maximum
Fastener Length:	0.375 Inches Nominal
Head Style:	Pan
Head Diameter:	0.256 Inches Minimum And 0.270 Inches Maximum
Head Height:	0.087 Inches Minimum And 0.097 Inches Maximum
Internal Drive Style:	Cross Recess Type 1
Nominal Thread Diameter:	0.138 Inches
Thread Quantity Per Inch:	32
Minimum Tensile Strength:	57000 Pounds Per Square Inch
Screw Material:	Copper Alloy
Screw Material Document And Classification:	Qq-b-626 Fed Spec Single Material Response Or Qq-w-321 Fed Spec Single Material Response
Screw Surface Treatment:	Oxide
Screw Surface Treatment Document And Classification:	Mil-f-495 Mil Std Single Treatment Response
Thread Series Designator:	Unc

## **How to Order**

Order this machine screw from our inventory online by visiting <a href="https://military-fasteners.com/screws/machine+screws/MS35214-25">https://military-fasteners.com/screws/machine+screws/MS35214-25</a> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check outhere to complete your order.