

Description


length: 5/16", thread: 4-40, fillister head screw cadmium plated carbon steel, coarse thread, MS35265 series screw

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	MS3526514
Minimum Qty (MOQ):	50
NSN:	5305-00-558-4887
Schedule B:	7318.15.6080
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

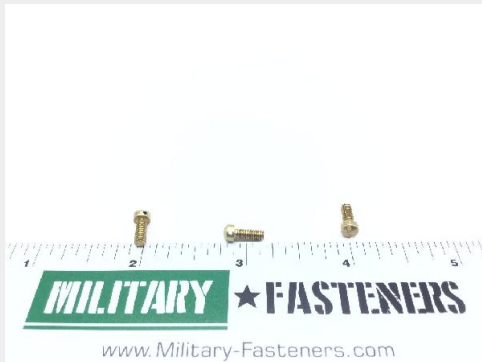

* See page 2 for technical characteristics

P/N MS35265-14 Specifications

Thread Class:	2a
Thread Direction:	Right-hand
Thread Length:	0.231 Inches Minimum And 0.281 Inches Maximum
Fastener Length:	0.281 Inches Minimum And 0.312 Inches Maximum
Head Style:	Fillister
Head Diameter:	0.166 Inches Minimum And 0.183 Inches Maximum
Head Height:	0.072 Inches Minimum And 0.079 Inches Maximum
Hole Diameter:	0.037 Inches Nominal
Internal Drive Style:	Slot
Nominal Thread Diameter:	0.112 Inches
Hole Quantity:	1
Thread Quantity Per Inch:	40
Minimum Tensile Strength:	55000 Pounds Per Square Inch
Screw Material:	Steel
Screw Material Document And Classification:	Qq-s-634 Fed Spec Single Material Response Or Qq-s-637 Fed Spec Single Material Response Or 66 Fed Std Single Material Response
Screw Surface Treatment:	Cadmium And Chromate
Screw Surface Treatment Document And Classification:	Qq-p-416 Ty2 Cl3 Fed Spec Single Treatment Response
Head Hole Configuration Style:	Round
Thread Series Designator:	Unc

How to Order

Order this machine screw from our inventory online by visiting <https://military-fasteners.com/screws/machine+screws/MS35265-14> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.