


Description

Thread Size: 3/8", MS51830 series insert

* Manufacturer certifications are shipped with your order FREE of charge[Order this part online](#)**Additional Information**

SKU / Model:	MS51830CA204L
Minimum Qty (MOQ):	2
NSN:	5325-01-070-6527
ECCN:	EAR99
National Motor Freight:	095190, Hardware, Noi Sub 9

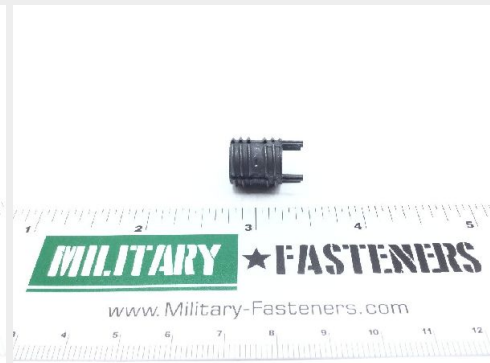

* See page 2 for technical characteristics

P/N MS51830CA204L Specifications

Thread Class:	3b
Length:	0.485 Inches Minimum And 0.515 Inches Maximum
Insert Size:	0.500-13 Unc-2a
Internal Thread Relief Depth:	0.060 Inches Minimum And 0.080 Inches Maximum
Full Internal Thread Length:	0.405 Inches Minimum And 0.455 Inches Maximum
Features Provided:	Individually Keyed
Thread Quantity Per Inch:	24
Nominal Thread Size:	0.375 Inches
Special Features:	Dry Film Lubricant Mil-I-8937
Material:	Iron Alloy 660 Overall
Material Document And Classification:	Ams 5737 Assn Std Single Material Response Overall
Surface Treatment:	Passivate Overall
Surface Treatment Document And Classification:	Qq-p-35 Fed Spec Single Treatment Response Overall
Style Designator:	Grooved Keylock
Thread Series Designator:	Unjf

How to Order

Order this screw thread insert from our inventory online by visiting <https://military-fasteners.com/inserts/screw+thread+inserts/MS51830CA204L> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.