


Description

Thread Size: 3/8", MS51830 series insert

* Manufacturer certifications are shipped with your order FREE of charge[Order this part online](#)**Additional Information**

| | |
|-------------------------|-----------------------------|
| SKU / Model: | MS51830CA204L |
| Minimum Qty (MOQ): | 2 |
| NSN: | 5325-01-070-6527 |
| ECCN: | EAR99 |
| National Motor Freight: | 095190, Hardware, Noi Sub 9 |

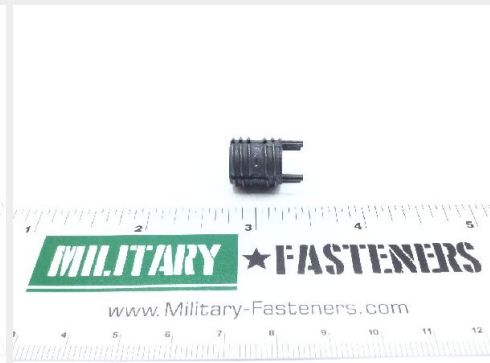

* See page 2 for technical characteristics

P/N MS51830CA204L Specifications

| | |
|---|--|
| Thread Class: | 3b |
| Length: | 0.485 Inches Minimum And 0.515 Inches Maximum |
| Insert Size: | 0.500-13 Unc-2a |
| Internal Thread Relief Depth: | 0.060 Inches Minimum And 0.080 Inches Maximum |
| Full Internal Thread Length: | 0.405 Inches Minimum And 0.455 Inches Maximum |
| Features Provided: | Individually Keyed |
| Thread Quantity Per Inch: | 24 |
| Nominal Thread Size: | 0.375 Inches |
| Special Features: | Dry Film Lubricant Mil-I-8937 |
| Material: | Iron Alloy 660 Overall |
| Material Document And Classification: | Ams 5737 Assn Std Single Material Response Overall |
| Surface Treatment: | Passivate Overall |
| Surface Treatment Document And Classification: | Qq-p-35 Fed Spec Single Treatment Response Overall |
| Style Designator: | Grooved Keylock |
| Thread Series Designator: | Unjf |

How to Order

Order this screw thread insert from our inventory online by visiting <https://military-fasteners.com/inserts/screw+thread+inserts/MS51830CA204L> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.