

Description


Length: 1/2", Thread: 6-32, Thread Length: 1/2", MS51849 series screw

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	MS5184934
Minimum Qty (MOQ):	50
NSN:	5305-00-230-8586
Schedule B:	7318.15.6080
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

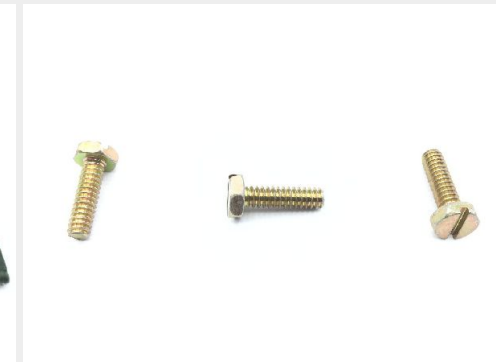

* See page 2 for technical characteristics

P/N MS51849-34 Specifications

Thread Class:	2a
Thread Direction:	Right-hand
Thread Length:	0.408 Inches Minimum And 0.500 Inches Maximum
Fastener Length:	0.470 Inches Minimum And 0.500 Inches Maximum
Head Style:	Hexagon
Head Height:	0.080 Inches Minimum And 0.093 Inches Maximum
Width Between Flats:	0.244 Inches Minimum And 0.250 Inches Maximum
Internal Drive Style:	Slot
Nominal Thread Diameter:	0.138 Inches
Thread Quantity Per Inch:	32
Minimum Tensile Strength:	60000 Pounds Per Square Inch
Screw Material:	Steel
Screw Material Document And Classification:	Qq-s-634 Fed Spec Single Material Response Or Qq-s-637 Fed Spec Single Material Response Or 66 Fed Std Single Material Response
Screw Surface Treatment:	Cadmium And Chromate
Screw Surface Treatment Document And Classification:	Qq-p-416 Fed Spec Single Treatment Response
Thread Series Designator:	Unc
Nondefinitive Spec/std Data:	1 Type And 10s Style

How to Order

Order this machine screw from our inventory online by visiting <https://military-fasteners.com/screws/machine+screws/MS51849-34> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.