

Description


Fastener Length: 3/4", Thread: 10-32, Thread Length: 3/4",

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

| | |
|-------------------------|---|
| SKU / Model: | MS5184966C |
| Minimum Qty (MOQ): | 20 |
| NSN: | 5305-01-358-8092 |
| ECCN: | EAR99 |
| National Motor Freight: | 093486, Bolts,nuts Or Screws, Noi (sub 3) |

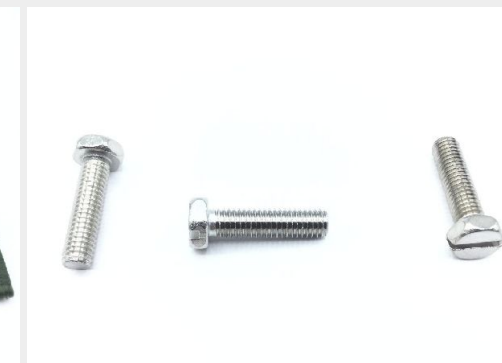

P/N MS51849-66C Specifications

| | |
|---|---|
| Thread Class: | 2a |
| Thread Direction: | Right-hand |
| Thread Length: | 0.658 Inches Minimum And 0.750 Inches Maximum |
| Fastener Length: | 0.720 Inches Minimum And 0.750 Inches Maximum |
| Head Style: | Hexagon |
| Head Height: | 0.105 Inches Minimum And 0.120 Inches Maximum |
| Width Between Flats: | 0.305 Inches Minimum And 0.312 Inches Maximum |
| Internal Drive Style: | Slot |
| End Item Identification: | Mrap-caiman |
| Nominal Thread Diameter: | 0.190 Inches |
| Thread Quantity Per Inch: | 32 |
| Minimum Tensile Strength: | 80000 Pounds Per Square Inch |
| Screw Material: | Steel Comp 301 Or Steel Comp 302 Or Steel Comp 303 Or Steel Comp 303se Or Steel Comp 304 Or Steel Comp 304l Or Steel Comp 302b Or Steel Comp 303cu Or Steel Comp 309 Or Steel Comp 310 Or Steel Comp 314 Or Steel Comp 316 Or Steel Comp 316l Or Steel Comp 317 Or Steel Comp 321 Or Steel Comp 347 Or Steel Comp 348 Or Steel Comp 384 |
| Screw Surface Treatment: | Passivate |
| Screw Surface Treatment Document And Classification: | Astm A380 Assn Std Single Treatment Response |
| Thread Series Designator: | Unf |

How to Order

Order this machine screw from our inventory online by visiting <https://military-fasteners.com/screws/machine+screws/MS51849-66C> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.