

Description

length: 1/4", MS51861 series screw

* Manufacturer certifications are shipped with your order FREE of charge


Order this part online

Additional Information

Alternate Part Numbers

[MS24617-1](#)

| | |
|-------------------------|---|
| SKU / Model: | MS5186112 |
| Minimum Qty (MOQ): | 100 |
| NSN: | 5305-00-140-8001 |
| Schedule B: | 7318.15.6080 |
| ECCN: | EAR99 |
| National Motor Freight: | 093486, Bolts,nuts Or Screws, Noi (sub 3) |

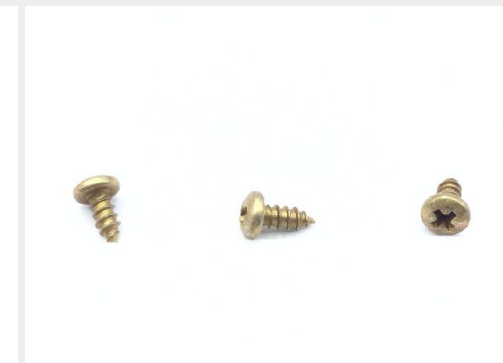

* See page 2 for technical characteristics

P/N MS51861-12 Specifications

| | |
|---|--|
| Fastener Length: | 0.250 Inches Minimum And 0.281 Inches Maximum |
| Head Style: | Pan |
| Head Diameter: | 0.205 Inches Minimum And 0.219 Inches Maximum |
| Head Height: | 0.070 Inches Minimum And 0.080 Inches Maximum |
| Internal Drive Style: | Cross Recess Type 1 |
| Features Provided: | Casehardened |
| Nonmachine Thread Style: | Gimlet Point (type A, Ab Or Ba) |
| Nonmachine Nominal Thread Diameter: | 0.112 Inches |
| Material: | Steel Overall |
| Surface Treatment: | Cadmium Overall And Chromate Overall |
| Surface Treatment Document And Classification: | Qq-p-416,type 2,class 3 Fed Spec Single Treatment Response Overall |
| Nondefinitive Spec/std Data: | Ab Type |

How to Order

Order this tapping screw from our inventory online by visiting <https://military-fasteners.com/screws/tapping+screws/MS51861-12> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.