


Description

Fastener Length: 1", Thread: 6-32, Thread Length: 63/64

* Manufacturer certifications are shipped with your order FREE of charge[Order this part online](#)**Additional Information**

SKU / Model:	MS5195934
Minimum Qty (MOQ):	100
NSN:	5305-00-765-4348
Schedule B:	7318.15.6080
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

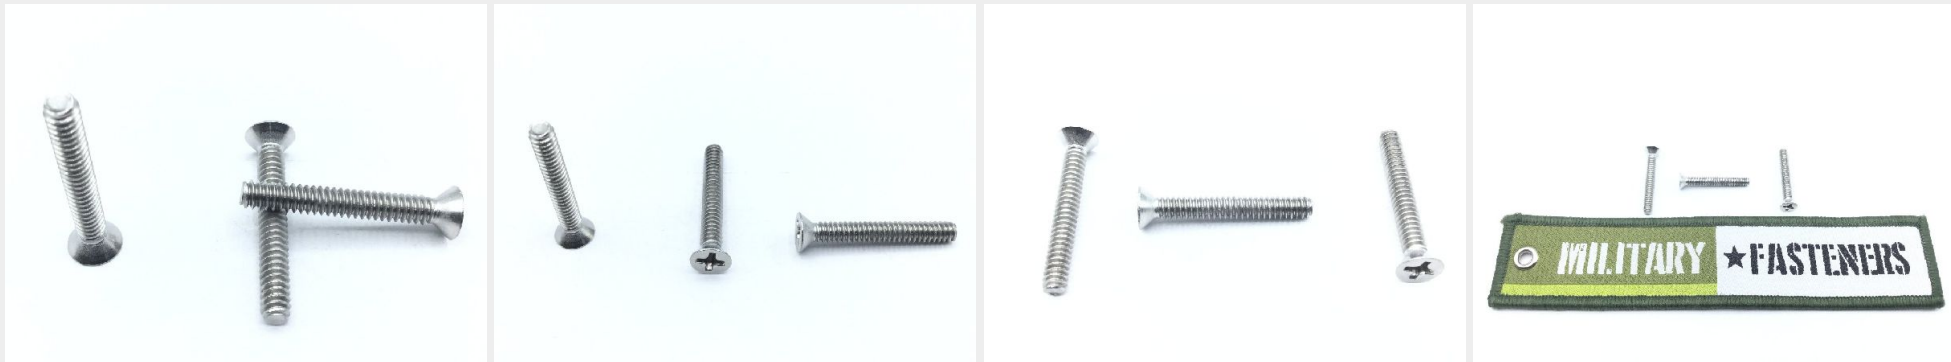

* See page 2 for technical characteristics

P/N MS51959-34 Specifications

Thread Class:	2a
Thread Direction:	Right-hand
Thread Length:	0.938 Inches Minimum And 1.000 Inches Maximum
Fastener Length:	1.000 Inches Nominal
Head Style:	Flat Countersunk
Head Diameter:	0.244 Inches Minimum And 0.279 Inches Maximum
Internal Drive Style:	Cross Recess Type 1
End Item Identification:	Helicopter, Advance Attack, Ah-1w;consolidated Targets;communications Terminal, Satellite An/gsc-39(v)1;aircraft, (Ac-130h, Mc-130h, Ec-130e, Hc
Nominal Thread Diameter:	0.138 Inches
Thread Quantity Per Inch:	32
Minimum Tensile Strength:	80000 Pounds Per Square Inch
Countersink Angle:	80.0 Degrees Minimum And 82.0 Degrees Maximum
Screw Material:	Steel Comp 302 Or Steel Comp 303 Or Steel Comp 304 Or Steel Comp 305 Or Steel Comp 316
Screw Material Document And Classification:	66 Fed Std All Material Responses
Screw Surface Treatment:	Passivate
Screw Surface Treatment Document And Classification:	Qq-p-35 Fed Spec Single Treatment Response
Thread Series Designator:	Unc

How to Order

Order this machine screw from our inventory online by visiting <https://military-fasteners.com/screws/machine+screws/MS51959-34> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.