


Description

Fastener Length: 1", Thread: 6-32, Thread Length: 63/64

* Manufacturer certifications are shipped with your order FREE of charge[Order this part online](#)**Additional Information**

| | |
|-------------------------|---|
| SKU / Model: | MS5195934 |
| Minimum Qty (MOQ): | 100 |
| NSN: | 5305-00-765-4348 |
| Schedule B: | 7318.15.6080 |
| ECCN: | EAR99 |
| National Motor Freight: | 093486, Bolts,nuts Or Screws, Noi (sub 3) |

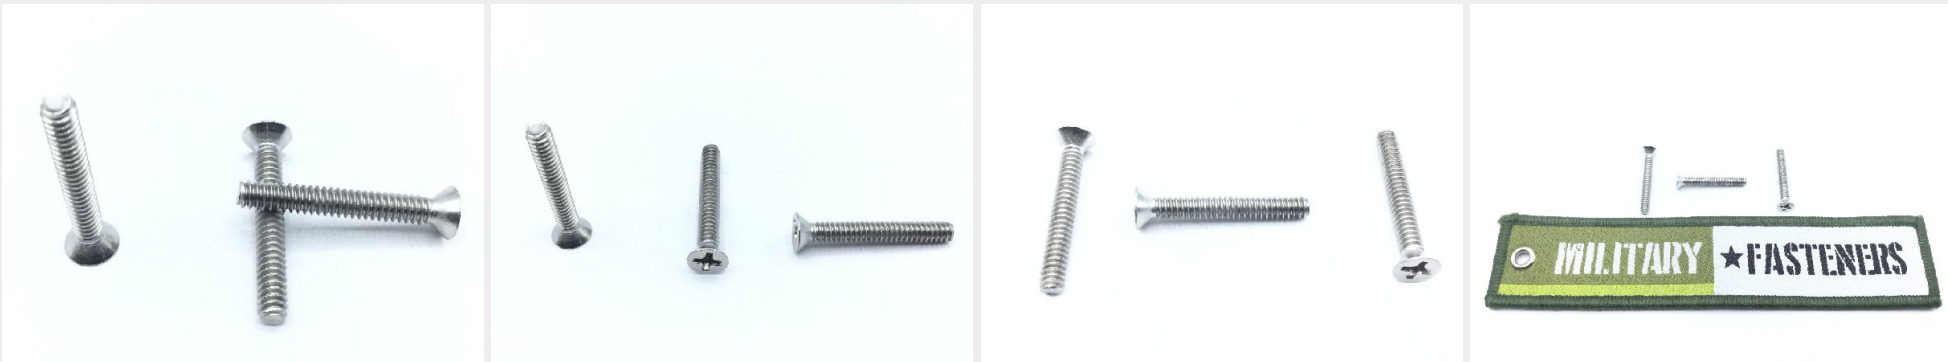

* See page 2 for technical characteristics

P/N MS51959-34 Specifications

| | |
|---|---|
| Thread Class: | 2a |
| Thread Direction: | Right-hand |
| Thread Length: | 0.938 Inches Minimum And 1.000 Inches Maximum |
| Fastener Length: | 1.000 Inches Nominal |
| Head Style: | Flat Countersunk |
| Head Diameter: | 0.244 Inches Minimum And 0.279 Inches Maximum |
| Internal Drive Style: | Cross Recess Type 1 |
| End Item Identification: | Helicopter, Advance Attack, Ah-1w;consolidated Targets;communications Terminal, Satellite An/gsc-39(v)1;aircraft, (Ac-130h, Mc-130h, Ec-130e, Hc |
| Nominal Thread Diameter: | 0.138 Inches |
| Thread Quantity Per Inch: | 32 |
| Minimum Tensile Strength: | 80000 Pounds Per Square Inch |
| Countersink Angle: | 80.0 Degrees Minimum And 82.0 Degrees Maximum |
| Screw Material: | Steel Comp 302 Or Steel Comp 303 Or Steel Comp 304 Or Steel Comp 305 Or Steel Comp 316 |
| Screw Material Document And Classification: | 66 Fed Std All Material Responses |
| Screw Surface Treatment: | Passivate |
| Screw Surface Treatment Document And Classification: | Qq-p-35 Fed Spec Single Treatment Response |
| Thread Series Designator: | Unc |

How to Order

Order this machine screw from our inventory online by visiting <https://military-fasteners.com/screws/machine+screws/MS51959-34> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.