

**Description**


Fastener Length: 3/32", Thread: 0-80, Thread Length: 1/8", MS51960 series screw

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information**

SKU / Model:	MS519601
Minimum Qty (MOQ):	100
NSN:	5305-00-774-9648
Schedule B:	7318.15.6080
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

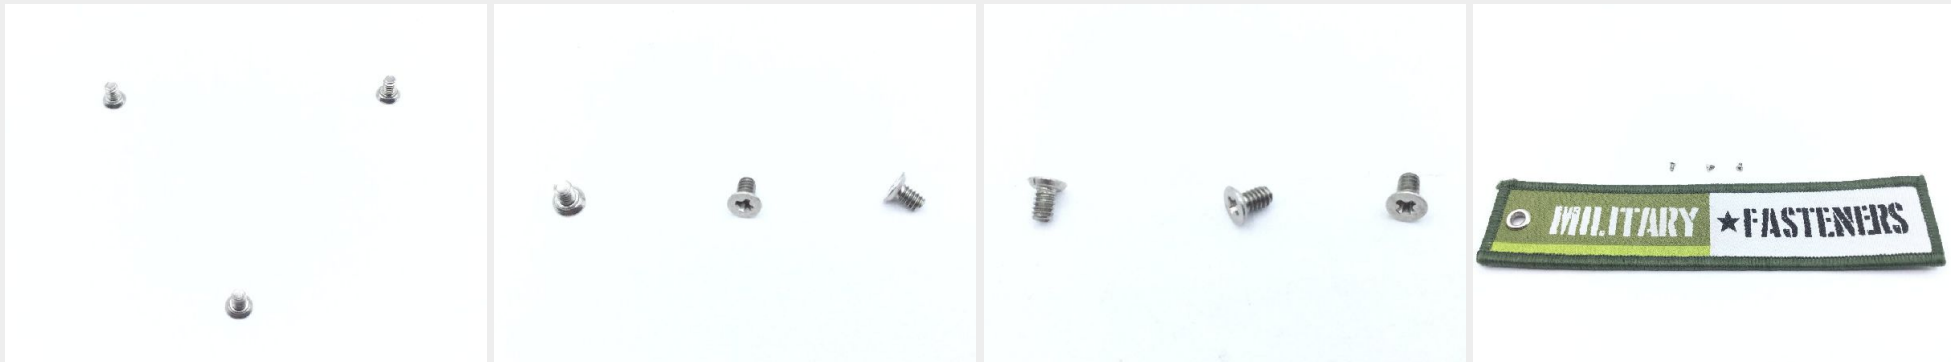

\* See page 2 for technical characteristics

## P/N MS51960-1 Specifications

<b>Thread Class:</b>	2a
<b>Thread Direction:</b>	Right-hand
<b>Thread Length:</b>	0.125 Inches Maximum
<b>Fastener Length:</b>	0.094 Inches Minimum And 0.125 Inches Maximum
<b>Head Style:</b>	Flat Countersunk Undercut
<b>Head Diameter:</b>	0.099 Inches Minimum And 0.119 Inches Maximum
<b>Head Height:</b>	0.018 Inches Minimum And 0.025 Inches Maximum
<b>Internal Drive Style:</b>	Cross Recess Type 1
<b>Nominal Thread Diameter:</b>	0.060 Inches
<b>Thread Quantity Per Inch:</b>	80
<b>Minimum Tensile Strength:</b>	80000 Pounds Per Square Inch
<b>Countersink Angle:</b>	80.0 Degrees Minimum And 82.0 Degrees Maximum
<b>Screw Material:</b>	Steel Comp 302 Or Steel Comp 303 Or Steel Comp 304 Or Steel Comp 305 Or Steel Comp 316
<b>Screw Material Document And Classification:</b>	66 Fed Std All Material Responses
<b>Screw Surface Treatment:</b>	Passivate
<b>Screw Surface Treatment Document And Classification:</b>	Qq-p-35 Fed Spec Single Treatment Response
<b>Thread Series Designator:</b>	Unf

## How to Order

Order this machine screw from our inventory online by visiting <https://military-fasteners.com/screws/machine+screws/MS51960-1> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.