

P/N MS51960-2B

Description

Fastener Length: 3/16", Thread: 0-80, Thread Length: 9/64", MS51960 series screw

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model: MS519602B


Minimum Qty (MOQ): 10

NSN: 5305-00-364-8975

Schedule B: 7318.15.6080

ECCN: 9A991

National Motor Freight: 093486, Bolts, nuts Or Screws, Noi (sub 3)

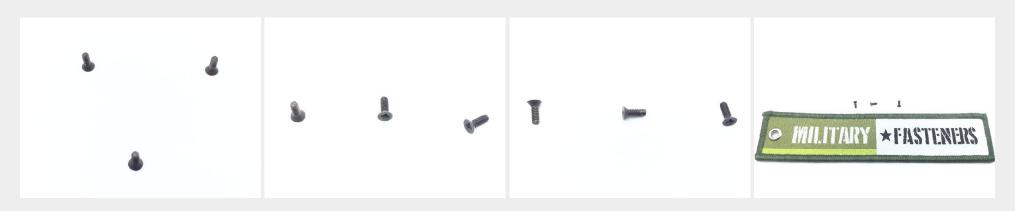

^{*} See page 2 for technical characteristics

P/N MS51960-2B Specifications

Thread Class:	2a
Thread Direction:	Right-hand
Thread Length:	0.097 Inches Minimum And 0.153 Inches Maximum
Fastener Length:	0.157 Inches Minimum And 0.188 Inches Maximum
Head Style:	Flat Countersunk
Head Diameter:	0.099 Inches Minimum And 0.119 Inches Maximum
Internal Drive Style:	Cross Recess Type 1
Nominal Thread Diameter:	0.060 Inches
Thread Quantity Per Inch:	80
Minimum Tensile Strength:	80000 Pounds Per Square Inch
Countersink Angle:	80.0 Degrees Minimum And 82.0 Degrees Maximum
Screw Material:	Steel Comp 301 Or Steel Comp 302 Or Steel Comp 303 Or Steel Comp 303 Plus X Or Steel Comp 303se Or Steel Comp 304 Or Steel Comp 304l Or Steel Comp 305 Or Steel Comp 308 Or Steel Comp 309 Or Steel Comp 309s Or Steel Comp 310 Or Steel Comp 310s Or Steel Comp 314 Or Steel Comp 316 Or Steel Comp 316l Or Steel Comp 317 Or Steel Comp 321 Or Steel Comp 323 Or Steel Comp 324 Or Steel Comp 347 Or Steel Comp 348 Or Steel Comp 385 Or Steel Comp 302b
Screw Material Document And Classification:	Qq-s-763,300 Series Fed Spec Single Material Response Or 66,300 Series Fed Std Single Material Response Or Comp 16-18 Or 18-8 Assn Std Single Material Response
Screw Surface Treatment:	Passivate
Screw Surface Treatment Document And Classification:	Mil-c-13924,cl 4 Mil Spec Single Treatment Response
Thread Series Designator:	Unf
Nondefinitive Spec/std Data:	3 Type And 2c Style

How to Order

