

Description

Fastener Length: 23/32", Thread: 3/8-16, Thread Length: 3/4",


* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information**Alternate Part Numbers**

[B1821BH038C075D](#)

SKU / Model:	MS9072558
Minimum Qty (MOQ):	25
NSN:	5305-00-115-9526
Schedule B:	7318.15.6080
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

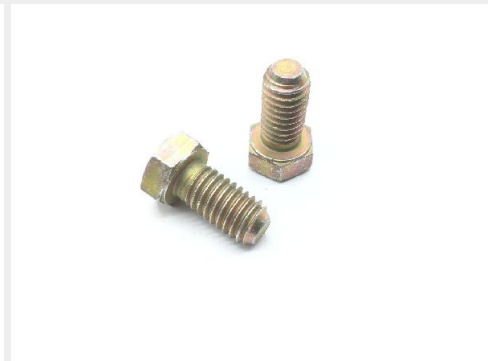

P/N MS90725-58 Specifications

Thread Class:	2a
Thread Direction:	Right-hand
Thread Length:	0.750 Inches Maximum
Fastener Length:	0.719 Inches Minimum And 0.750 Inches Maximum
Head Style:	Hexagon
Head Height:	0.226 Inches Minimum And 0.243 Inches Maximum
Width Between Flats:	0.551 Inches Minimum And 0.563 Inches Maximum
Nominal Thread Diameter:	0.375 Inches
Thread Quantity Per Inch:	16
Minimum Tensile Strength:	150000 Pounds Per Square Inch
Hardness Rating:	32.0 Rockwell C Minimum Overall And 38.0 Rockwell C Maximum Overall
Surface Finish:	63.0 Microinches Threads
Material:	Steel Overall
Material Document And Classification:	Sae Gr 8 Assn Std Single Material Response Overall
Surface Treatment:	Zinc Overall And Chromate Overall
Surface Treatment Document And Classification:	Astm B633 Ty 2 Sc 3 Assn Std Single Treatment Response Overall
Thread Series Designator:	Unc
Nondefinitive Spec/std Data:	2 Type And 10p Style And 8 Grade

How to Order

Order this machine screw from our inventory online by visiting <https://military-fasteners.com/screws/machine+screws/MS90725-58> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.