

Description


Fastener Length: 5/8", Thread: 1/4-28, Thread Length: 5/8", MS90726 series screw

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

| | |
|-------------------------|---|
| SKU / Model: | MS907265 |
| Minimum Qty (MOQ): | 100 |
| NSN: | 5305-00-267-8953 |
| Schedule B: | 7318.15.8085 |
| ECCN: | EAR99 |
| National Motor Freight: | 093486, Bolts,nuts Or Screws, Noi (sub 3) |

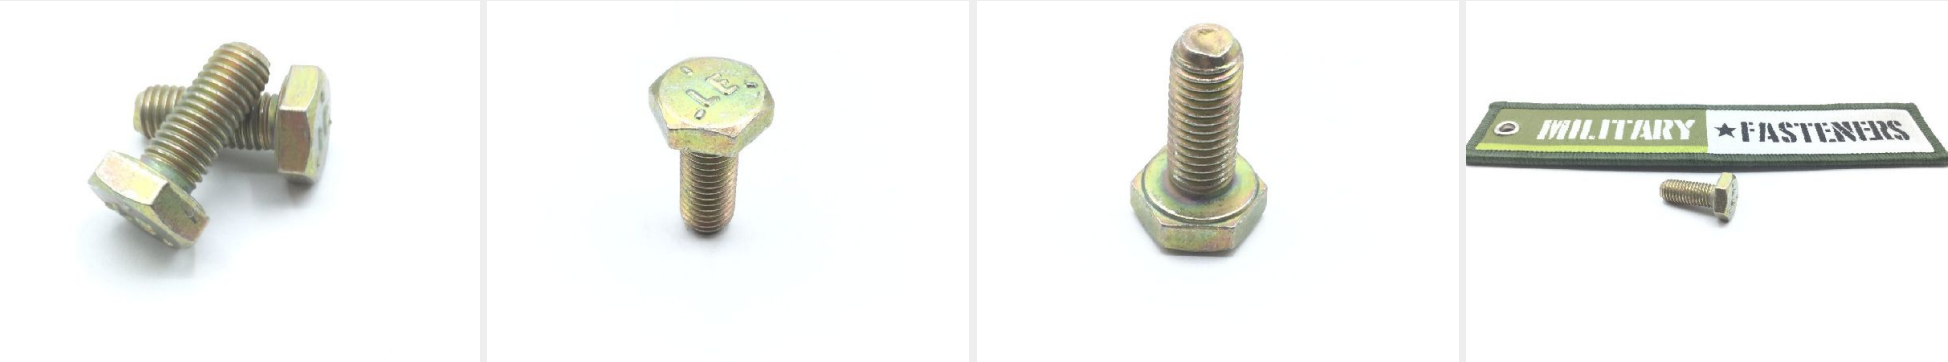

* See page 2 for technical characteristics

P/N MS90726-5 Specifications

| | |
|---|--|
| Thread Class: | 2a |
| Thread Direction: | Right-hand |
| Thread Length: | 0.625 Inches Maximum |
| Fastener Length: | 0.625 Inches Nominal |
| Head Style: | Hexagon |
| Head Height: | 0.150 Inches Minimum And 0.163 Inches Maximum |
| Width Between Flats: | 0.428 Inches Minimum And 0.438 Inches Maximum |
| End Item Identification: | Mrap - Cougar |
| End Item Identification: | Mrap - Cougar Cat1 A1; Mrap - Cougar Iss 1.0 |
| Nominal Thread Diameter: | 0.250 Inches |
| Features Provided: | Finished Head |
| Thread Quantity Per Inch: | 28 |
| Minimum Tensile Strength: | 150000 Pounds Per Square Inch |
| Hardness Rating: | 32.0 Rockwell C Minimum And 38.0 Rockwell C Maximum Overall |
| Minimum Yield Strength: | 120000 Pounds Per Square Inch |
| Material: | Steel Overall |
| Material Document And Classification: | Saej429grade8 Assn Std Single Material Response Overall |
| Surface Treatment: | Zinc And Chromate Overall |
| Surface Treatment Document And Classification: | Astm B633 Ty 2 Sc 3 Assn Std Single Treatment Response Overall |
| Thread Series Designator: | Unf |
| Nondefinitive Spec/std Data: | 2 Type And 10p Style And 8 Grade |

How to Order

Order this hexagon head cap screw from our inventory online by visiting <https://military-fasteners.com/screws/hexagon+head+cap+screws/MS90726-5> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.