

Description


Hole Diameter: 1/8",

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

| | |
|-------------------------|---|
| SKU / Model: | MS927608 |
| Minimum Qty (MOQ): | 10 |
| NSN: | 5310-01-131-4715 |
| ECCN: | EAR99 |
| National Motor Freight: | 194160, Washer Or Gaskets, Iron Or Steel, |

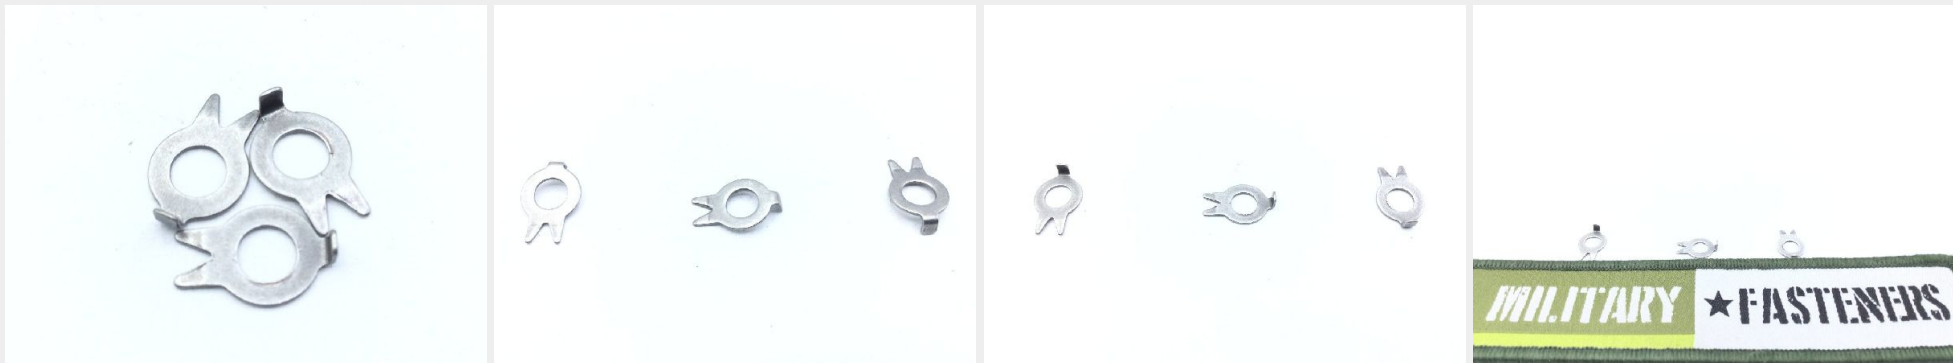

P/N MS9276-08 Specifications

| | |
|---|--|
| Hole Diameter: | 0.170 Inches Minimum And 0.175 Inches Maximum |
| Outside Diameter: | 0.310 Inches Minimum And 0.320 Inches Maximum |
| External Prebent Key Length: | 0.080 Inches Minimum And 0.090 Inches Maximum |
| External Tapered Key Width: | 0.175 Inches Minimum And 0.185 Inches Maximum |
| External Prebent Key Width: | 0.080 Inches Minimum And 0.085 Inches Maximum |
| Distance From Centerline To Inside Of Prebent Key: | 0.181 Inches Minimum And 0.191 Inches Maximum |
| Overall Distance Including Keys: | 0.483 Inches Nominal |
| Split Key Length: | 0.115 Inches Nominal |
| External Key Quantity: | 1 |
| Material Thickness: | 0.019 Inches Minimum And 0.025 Inches Maximum |
| Angle Between External Keys: | 50.0 Degrees Nominal |
| External Prebent Key Angle: | 15.0 Degrees Nominal |
| Material: | Steel Comp 321 Overall |
| Material Document And Classification: | Ams 5510 Assn Std Single Material Response Overall |
| Style Designator: | Key |

How to Order

Order this key washer from our inventory online by visiting <https://military-fasteners.com/washers/key+washers/MS9276-08> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.