

Description


Hole Diameter: 1/2", 15 degree angle, MS9276 series washer

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	MS927614
Minimum Qty (MOQ):	10
NSN:	5310-00-159-6281
Schedule B:	7318.22.0000
ECCN:	EAR99
National Motor Freight:	194160, Washer Or Gaskets, Iron Or Steel,

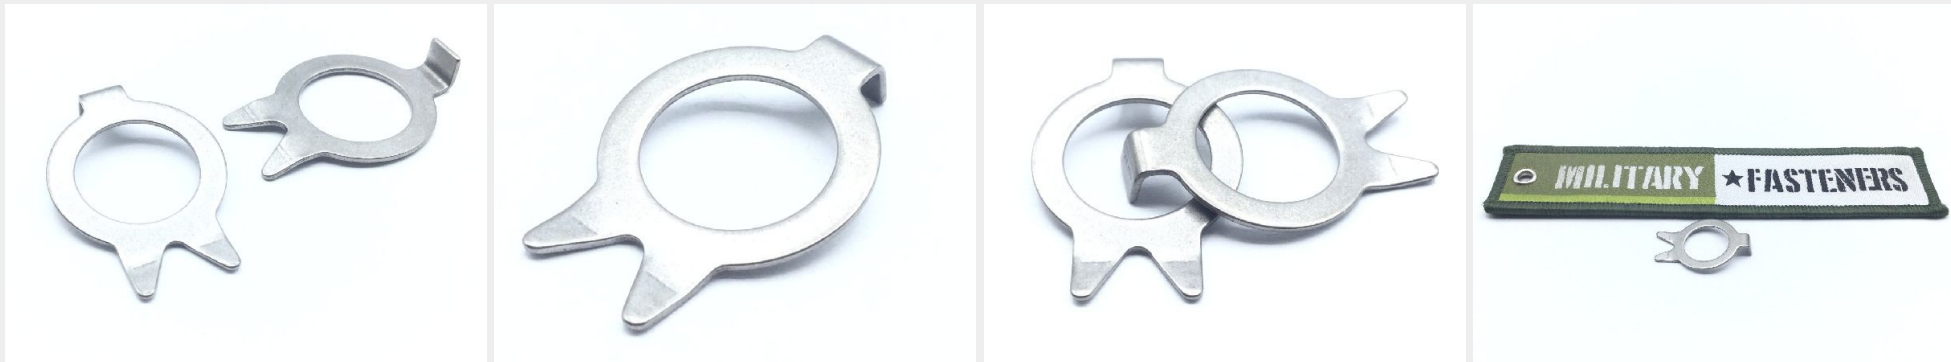

* See page 2 for technical characteristics

P/N MS9276-14 Specifications

Hole Diameter:	0.515 Inches Minimum And 0.520 Inches Maximum
Outside Diameter:	0.745 Inches Minimum And 0.755 Inches Maximum
External Prebent Key Length:	0.150 Inches Minimum And 0.160 Inches Maximum
External Tapered Key Width:	0.425 Inches Minimum And 0.435 Inches Maximum
External Prebent Key Width:	0.200 Inches Minimum And 0.205 Inches Maximum
Distance From Centerline To Inside Of Prebent Key:	0.465 Inches Minimum And 0.475 Inches Maximum
Overall Distance Including Keys:	1.087 Inches Minimum And 1.115 Inches Maximum
Split Key Length:	0.215 Inches Minimum And 0.220 Inches Maximum
External Key Quantity:	3
Material Thickness:	0.032 Inches Minimum And 0.040 Inches Maximum
Angle Between External Keys:	58.0 Degrees Minimum And 62.0 Degrees Maximum
External Prebent Key Angle:	15.0 Degrees Nominal
Surface Finish:	16.0 Microinches Top
Surface Finish:	32.0 Microinches Bottom
Material:	Steel Comp 321 Overall
Material Document And Classification:	Ams 5510 Assn Std Single Material Response Overall
Style Designator:	Key

How to Order

Order this key washer from our inventory online by visiting <https://military-fasteners.com/washers/key+washers/MS9276-14> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.