



★ FASTENERS

[Military-Fasteners.com](http://Military-Fasteners.com)

**P/N MS9276-14**

## Description


Hole Diameter: 1/2", 15 degree angle, MS9276 series washer

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

## Additional Information

SKU / Model:	MS927614
Minimum Qty (MOQ):	10
NSN:	5310-00-159-6281
Schedule B:	7318.22.0000
ECCN:	EAR99
National Motor Freight:	194160, Washer Or Gaskets, Iron Or Steel,

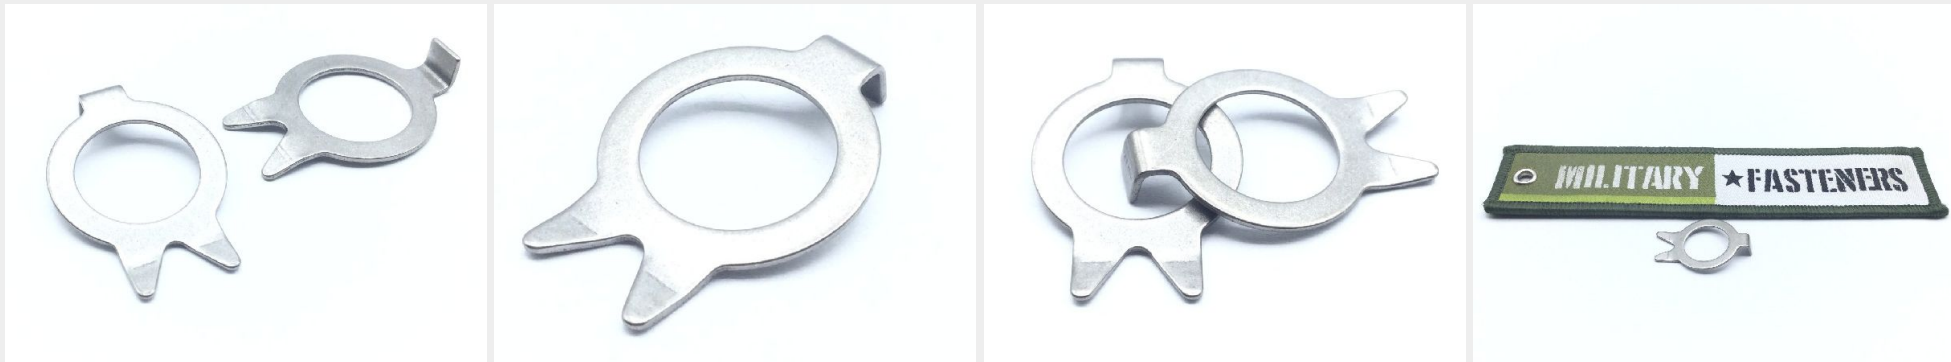

\* See page 2 for technical characteristics

## P/N MS9276-14 Specifications

<b>Hole Diameter:</b>	0.515 Inches Minimum And 0.520 Inches Maximum
<b>Outside Diameter:</b>	0.745 Inches Minimum And 0.755 Inches Maximum
<b>External Prebent Key Length:</b>	0.150 Inches Minimum And 0.160 Inches Maximum
<b>External Tapered Key Width:</b>	0.425 Inches Minimum And 0.435 Inches Maximum
<b>External Prebent Key Width:</b>	0.200 Inches Minimum And 0.205 Inches Maximum
<b>Distance From Centerline To Inside Of Prebent Key:</b>	0.465 Inches Minimum And 0.475 Inches Maximum
<b>Overall Distance Including Keys:</b>	1.087 Inches Minimum And 1.115 Inches Maximum
<b>Split Key Length:</b>	0.215 Inches Minimum And 0.220 Inches Maximum
<b>External Key Quantity:</b>	3
<b>Material Thickness:</b>	0.032 Inches Minimum And 0.040 Inches Maximum
<b>Angle Between External Keys:</b>	58.0 Degrees Minimum And 62.0 Degrees Maximum
<b>External Prebent Key Angle:</b>	15.0 Degrees Nominal
<b>Surface Finish:</b>	16.0 Microinches Top
<b>Surface Finish:</b>	32.0 Microinches Bottom
<b>Material:</b>	Steel Comp 321 Overall
<b>Material Document And Classification:</b>	Ams 5510 Assn Std Single Material Response Overall
<b>Style Designator:</b>	Key

## How to Order

Order this key washer from our inventory online by visiting <https://military-fasteners.com/washers/key+washers/MS9276-14> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.