



★ FASTENERS

Military-Fasteners.com

**P/N NAS1096-1-4**

## Description


length: 1/4", thread: 6-32, hex head, recessed, full thread, cadmium plated alloy steel, NAS1096 series screw

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

## Additional Information

SKU / Model:	NAS109614
Minimum Qty (MOQ):	100
NSN:	5305-01-087-7005
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

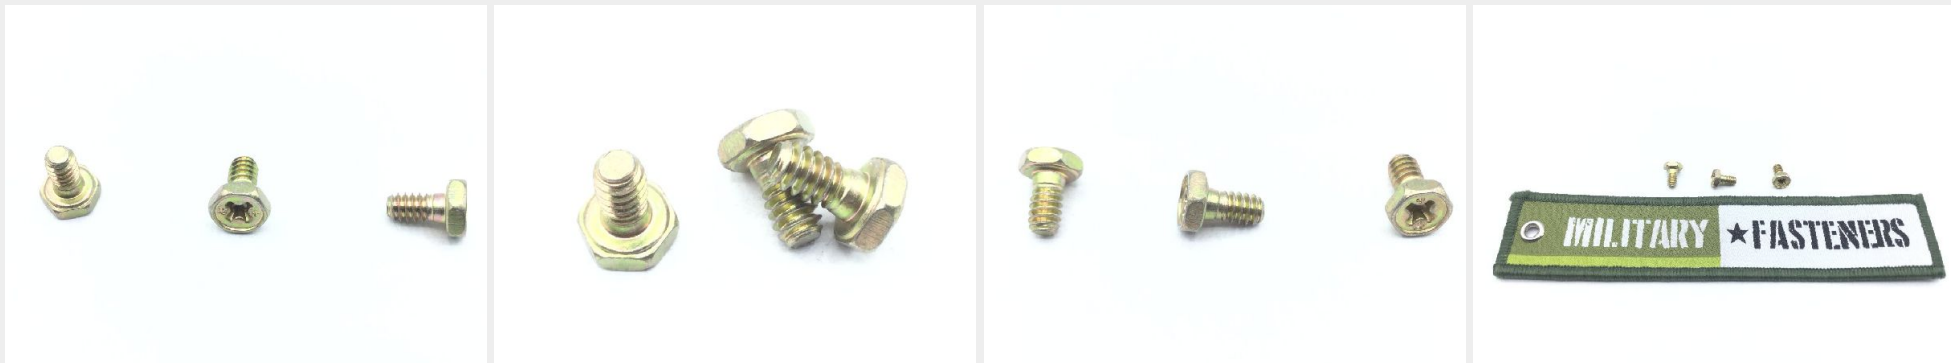

\* See page 2 for technical characteristics

## P/N NAS1096-1-4 Specifications

<b>Thread Class:</b>	3a
<b>Thread Direction:</b>	Right-hand
<b>Thread Length:</b>	0.170 Inches Minimum And 0.249 Inches Maximum
<b>Fastener Length:</b>	0.234 Inches Minimum And 0.281 Inches Maximum
<b>Head Style:</b>	Hexagon
<b>Head Height:</b>	0.080 Inches Minimum And 0.095 Inches Maximum
<b>Width Between Flats:</b>	0.241 Inches Minimum And 0.250 Inches Maximum
<b>Internal Drive Style:</b>	Cross Recess Type 1
<b>Nominal Thread Diameter:</b>	0.138 Inches
<b>Thread Quantity Per Inch:</b>	32
<b>Minimum Tensile Strength:</b>	125000 Pounds Per Square Inch
<b>Hardness Rating:</b>	26.0 Rockwell C Minimum And 32.0 Rockwell C Maximum
<b>Screw Material:</b>	Steel Comp 4037 Or Steel Comp 8630
<b>Screw Material Document And Classification:</b>	Ams 6300 Assn Std 1st Material Response Or Mil-s-6050 Mil Spec 2nd Material Response
<b>Screw Surface Treatment:</b>	Cadmium And Chromate
<b>Screw Surface Treatment Document And Classification:</b>	Qq-p-416 Ty 2 Cl 2 Fed Spec Single Treatment Response
<b>Thread Series Designator:</b>	Unc
<b>Specification/standard Data:</b>	80205-nas1096 Professional/industrial Association Standard

## How to Order

Order this machine screw from our inventory online by visiting <https://military-fasteners.com/screws/machine+screws/NAS1096-1-4> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.