

Description


length: 5/16", thread: 10-32, hex head, recessed, full thread, cadmium plated alloy steel

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	NAS109635
Minimum Qty (MOQ):	100
NSN:	5305-00-483-7758
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

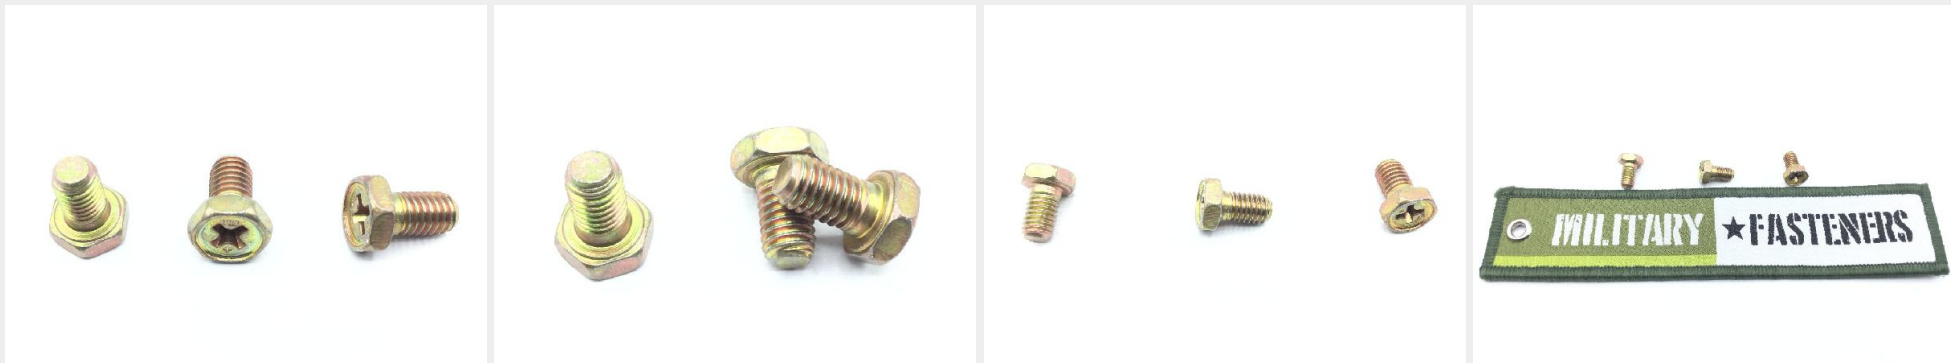

P/N NAS1096-3-5 Specifications

Thread Class:	3a
Thread Direction:	Right-hand
Thread Length:	0.296 Inches Minimum And 0.343 Inches Maximum
Fastener Length:	0.296 Inches Minimum And 0.343 Inches Maximum
Head Style:	Hexagon
Head Height:	0.105 Inches Minimum And 0.120 Inches Maximum
Width Between Flats:	0.302 Inches Minimum And 0.313 Inches Maximum
Internal Drive Style:	Cross Recess Type 1
Nominal Thread Diameter:	0.190 Inches
Thread Quantity Per Inch:	32
Minimum Tensile Strength:	125000 Pounds Per Square Inch
Screw Material:	Steel Comp 4130 Or Steel Comp 8630 Or Steel Comp 8735 Or Steel Comp 8740
Screw Material Document And Classification:	Mil-s-6758 Mil Spec 1st Material Response Or Mil-s-6050 Mil Spec 2nd Material Response Or Mil-s-6098 Mil Spec 3rd Material Response Or Mil-s-6049 Mil Spec 4th Material Response
Screw Surface Treatment:	Cadmium And Chromate
Screw Surface Treatment Document And Classification:	Qq-p-416,ty 2,c1 3 Fed Spec All Treatment Responses
Thread Series Designator:	Unf

How to Order

Order this machine screw from our inventory online by visiting <https://military-fasteners.com/screws/machine+screws/NAS1096-3-5> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.