

**Description**


Fastener Length: 5/16", roughly 4100 pieces per pound, NAS1097 series rivet

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information**

|                         |   |
|-------------------------|---|
| SKU / Model:            | NAS1097AD35D                              |
| Minimum Qty (MOQ):      | 500                                       |
| NSN:                    | 5320-01-426-3141                          |
| Schedule B:             | 7616.10.3000                              |
| ECCN:                   | EAR99                                     |
| National Motor Freight: | 096320, Rivets I / S Nickel Plated Buffed |

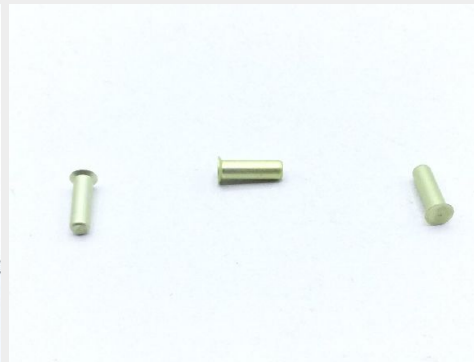

## P/N NAS1097AD3-5D Specifications

|   |   |
|---|---|
| <b>Identification Code Color:</b>                     | Yellow  |
| <b>Fastener Length:</b>                               | 0.302 Inches Minimum And 0.322 Inches Maximum                   |
| <b>Head Style:</b>                                    | Undersized Oval Countersunk                                     |
| <b>Head Height:</b>                                   | 0.003 Inches Minimum And 0.005 Inches Maximum                   |
| <b>Shank Diameter:</b>                                | 0.093 Inches Minimum And 0.096 Inches Maximum                   |
| <b>Shank Style:</b>                                   | Straight W/radius Chamfered Tip                                 |
| <b>Head Major Diameter:</b>                           | 0.1263 Inches Minimum And 0.1478 Inches Maximum                 |
| <b>Head Minor Diameter:</b>                           | 0.086 Nominal Mils And 0.096 Nominal Centimeters                |
| <b>Countersink Height:</b>                            | 0.0089 Inches Minimum And 0.0123 Inches Maximum                 |
| <b>Countersink Angle:</b>                             | 70.0 Degrees Minimum And 130.0 Degrees Maximum                  |
| <b>Heat Treatment:</b>                                | T-4 Solution Heat Treated Overall                               |
| <b>Material:</b>                                      | Aluminum Alloy 2117 Overall                                     |
| <b>Material Document And Classification:</b>          | Qq-a-430 Fed Spec Single Material Response Overall              |
| <b>Surface Treatment:</b>                             | Anodize Overall   |
| <b>Surface Treatment Document And Classification:</b> | Mil-a-8625, Ty2, Cl1 Mil Spec Single Treatment Response Overall |
| <b>Specification/standard Data:</b>                   | 80205-nas1097 Professional/industrial Association Standard      |

## How to Order

Order this solid rivet from our inventory online by visiting <https://military-fasteners.com/rivets/solid+rivets/NAS1097AD3-5D> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.