

Description



length: 5/8" diameter: 1/4", flush shear head, aluminum alloy, roughly 275 pieces per pound

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	NAS1097AD810
Minimum Qty (MOQ):	1 Pound
NSN:	5320-01-412-2740
ECCN:	EAR99
National Motor Freight:	096320, Rivets I / S Nickel Plated Buffed

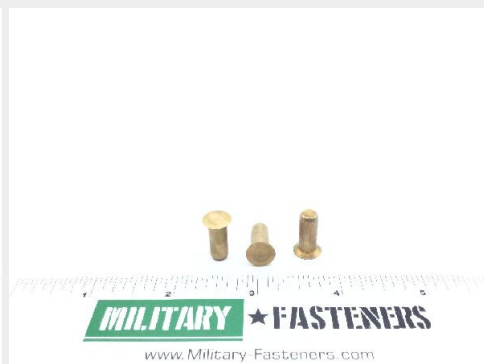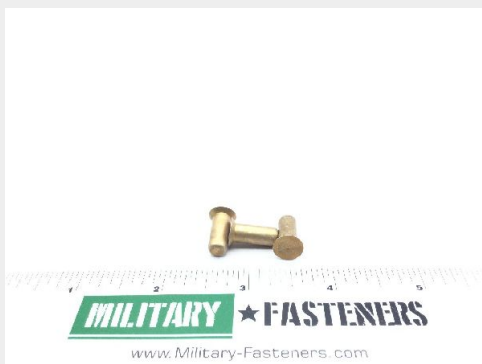

* See page 2 for technical characteristics

P/N NAS1097AD8-10 Specifications

Identification Code Color:	Yellow
Fastener Length:	0.615 Inches Minimum And 0.635 Inches Maximum
Head Style:	Undersized Oval Countersunk
Head Height:	0.004 Inches Minimum And 0.006 Inches Maximum
Shank Diameter:	0.249 Inches Minimum And 0.252 Inches Maximum
Shank Style:	Straight W/radius Chamfered Tip
Head Major Diameter:	0.3756 Inches Minimum And 0.3948 Inches Maximum
Head Minor Diameter:	0.316 Nominal Mils And 0.326 Nominal Centimeters
Countersink Height:	0.0232 Inches Minimum And 0.0278 Inches Maximum
Countersink Angle:	100.0 Degrees Nominal
Special Features:	Finish:chemical Conversion Per Mil-c-5541, Class 1a
Heat Treatment:	T-4 Solution Heat Treated Overall
Material:	Aluminum Alloy 2117 Overall
Material Document And Classification:	Qq-a-430 Fed Spec Single Material Response Overall
Specification/standard Data:	80205-nas1097 Professional/industrial Association Standard

How to Order

Order this solid rivet from our inventory online by visiting <https://military-fasteners.com/rivets/solid+rivets/NAS1097AD8-10> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.