


Description

Fastener Length: 15/32", Thread Length: 19/64

* Manufacturer certifications are shipped with your order FREE of charge[Order this part online](#)**Additional Information****Alternate Part Numbers**[NAS1121-E3](#)

SKU / Model:	NAS1121E3
Minimum Qty (MOQ):	10
NSN:	5305-00-432-5599
Schedule B:	7318.15.6080
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

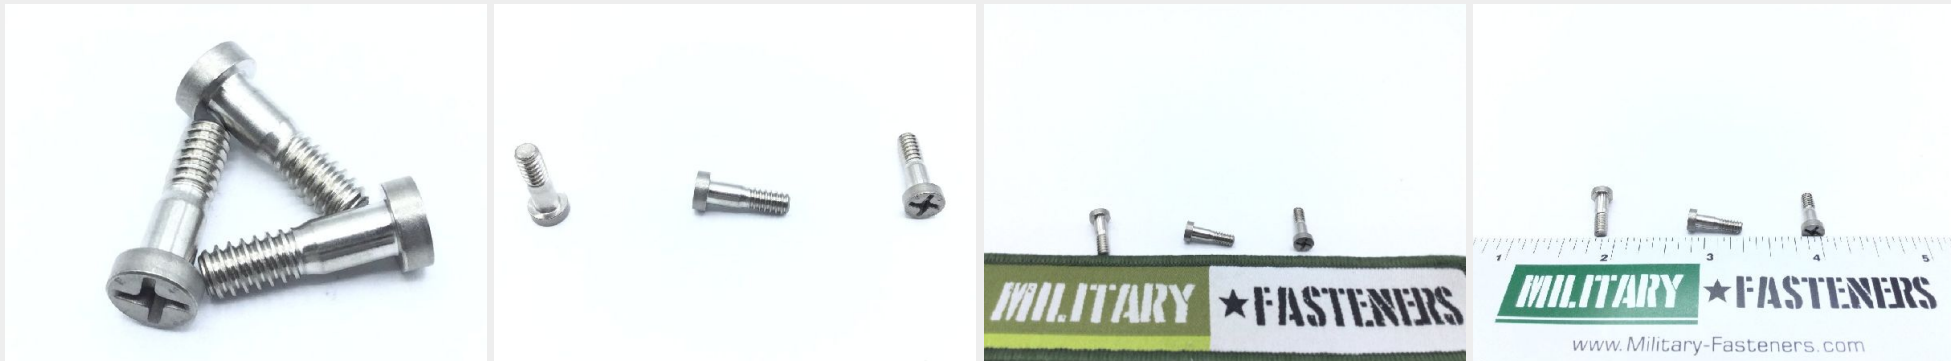

* See page 2 for technical characteristics

P/N NAS1121E3 Specifications

Thread Class:	3a
Thread Length:	0.251 Inches Minimum And 0.301 Inches Maximum
Fastener Length:	0.449 Inches Minimum And 0.479 Inches Maximum
Head Height:	0.074 Inches Minimum And 0.086 Inches Maximum
Minimum Tensile Strength:	160000 Pounds Per Square Inch
Surface Finish:	32.0 Microinches Bearing Surface Of Head
Surface Finish:	32.0 Microinches Grip
Surface Finish:	32.0 Microinches Threads
Material:	Iron Alloy 660 Overall
Material Document And Classification:	Ams 5737 Assn Std Single Material Response Overall
Surface Treatment:	Passivate Overall
Surface Treatment Document And Classification:	Qq-p-35 Fed Spec Single Treatment Response Overall

How to Order

Order this close tolerance bolt from our inventory online by visiting <https://military-fasteners.com/bolts/close+tolerance+bolts/NAS1121E3> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.