

Description


Fastener Length: 1/4", Thread: 6-32, Thread Length: 1/4",

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	NAS119006P4
Minimum Qty (MOQ):	5
NSN:	5305-00-702-1637
Schedule B:	7318.15.6080
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

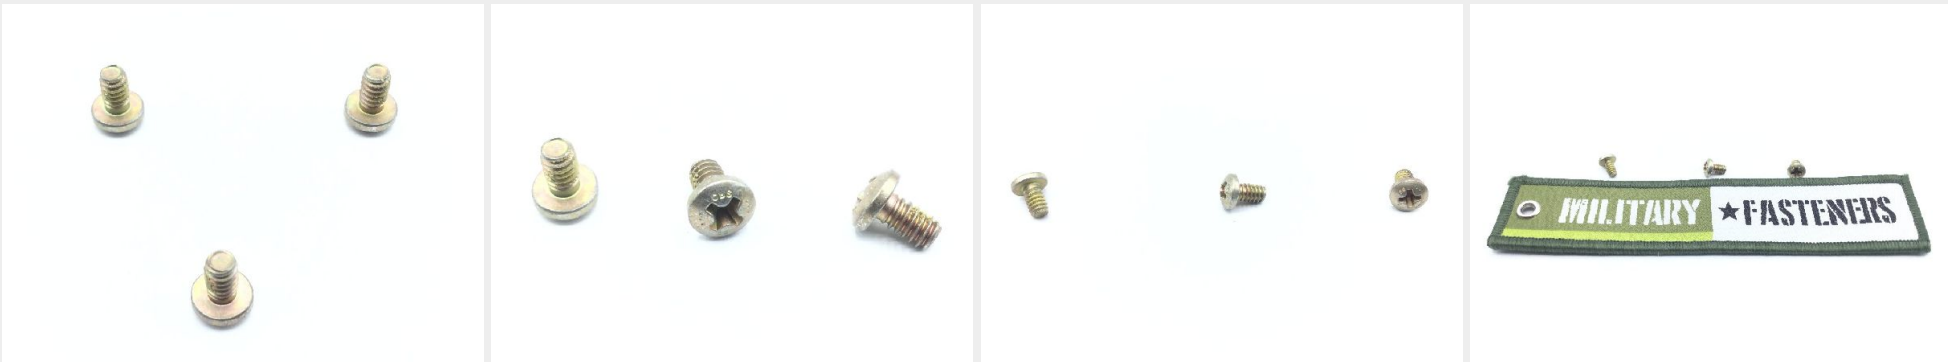

P/N NAS1190-06P4 Specifications

Thread Class:	3a
Thread Direction:	Right-hand
Thread Length:	0.250 Inches Maximum
Fastener Length:	0.219 Inches Minimum And 0.250 Inches Maximum
Head Style:	Pan
Head Diameter:	0.256 Inches Minimum And 0.270 Inches Maximum
Head Height:	0.087 Inches Minimum And 0.097 Inches Maximum
Locking Feature:	Patch Threads Or Pellet Threads
Internal Drive Style:	Cross Recess Type 1
Nominal Thread Diameter:	0.138 Inches
Thread Quantity Per Inch:	32
Minimum Tensile Strength:	160000 Pounds Per Square Inch
Hardness Rating:	36.0 Rockwell C Minimum Overall And 40.0 Rockwell C Maximum Overall
Material:	Steel Comp E4340 Overall Or Steel Comp 8740 Overall Or Steel Comp 8735 Overall Or Steel Comp 6150 Overall Or Steel Comp 4140 Overall Or Steel Comp 4037 Overall
Material Document And Classification:	Mil-s-5000 Mil Spec 1st Material Response Overall Or Mil-s-6049 Mil Spec 2nd Material Response Overall Or Mil-s-6098 Mil Spec 3rd Material Response Overall Or Mil-s-8503 Mil Spec 4th Material Response Overall Or Mil-s-5626 Mil Spec 5th Material Response Overall Or Ams 6300 Assn Std 6th Material Response Overall
Surface Treatment:	Cadmium Overall And Chromate Overall
Surface Treatment Document And Classification:	Qq-p-416,ty 2 Cl 2 Fed Spec Single Treatment Response Overall
Thread Series Designator:	Unc

How to Order

Order this machine screw from our inventory online by visiting <https://military-fasteners.com/screws/machine+screws/NAS1190-06P4> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.