


Description

Machine Screw part number

* Manufacturer certifications are shipped with your order FREE of charge[Order this part online](#)**Additional Information**

SKU / Model:	NAS11904P12
Minimum Qty (MOQ):	10
NSN:	5305-01-215-6025
Schedule B:	7318.15.6080
ECCN:	EAR99
National Motor Freight:	096640, Screws, Iron Or Steel

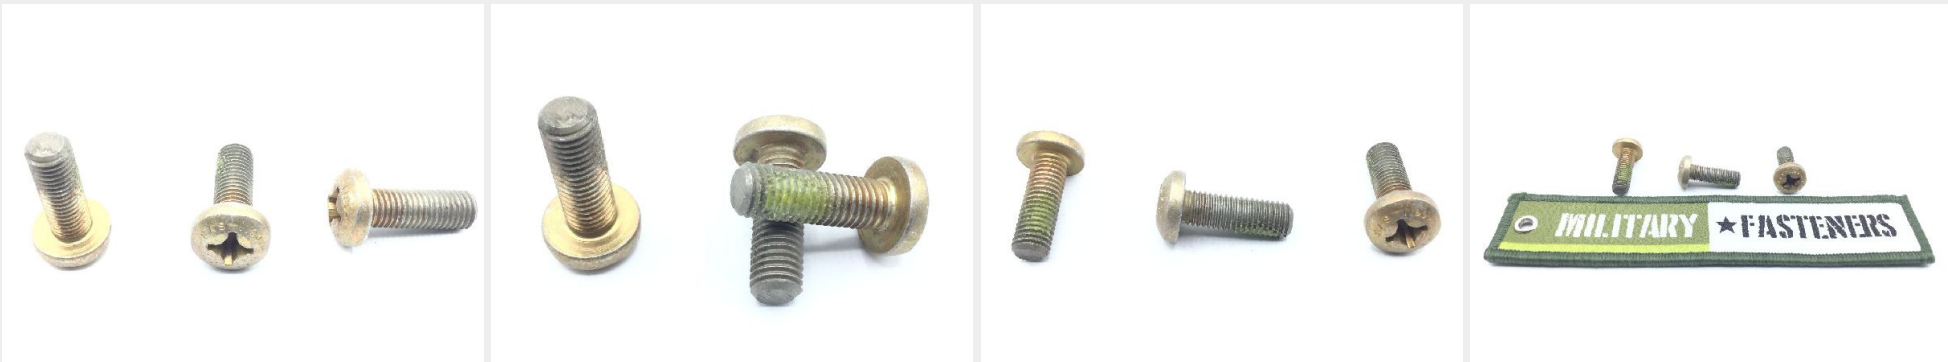

* See page 2 for technical characteristics

P/N NAS1190-4P12 Specifications

Thread Class:	3a
Thread Direction:	Right-hand
Thread Length:	0.648 Inches Minimum And 0.750 Inches Maximum
Fastener Length:	0.719 Inches Minimum And 0.750 Inches Maximum
Head Style:	Pan
Head Diameter:	0.472 Inches Minimum And 0.493 Inches Maximum
Head Height:	0.162 Inches Minimum And 0.175 Inches Maximum
Internal Drive Style:	Cross Recess Type 1
Nominal Thread Diameter:	0.250 Inches
Thread Quantity Per Inch:	28
Minimum Tensile Strength:	5520 Pounds Per Square Inch
Hardness Rating:	36.0 Rockwell C Minimum And 40.0 Rockwell C Maximum Overall
Material:	Steel Comp 4140 Or Steel Comp E4340 Or Steel Or Steel Comp 8740 Overall
Material Document And Classification:	Mil-s-5626 Mil Spec 1st Material Response Or Mil-s-8844 Mil Spec 2nd Material Response Or Ams6414 Assn Std 3rd Material Response Or Mil-s-6049 Mil Spec 4th Material Response Overall
Surface Treatment:	Cadmium Overall
Surface Treatment Document And Classification:	Qq-p-416 Ty2 Cl2 Fed Spec Single Treatment Response Overall
Thread Series Designator:	Unjf
Specification/standard Data:	80205-nas1190 Professional/Industrial Association Standard

How to Order

Order this machine screw from our inventory online by visiting <https://military-fasteners.com/screws/machine+screws/NAS1190-4P12> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.