

Description


Fastener Length: 11/16", roughly 400 pieces per pound, NAS1200 series rivet

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	NAS1200411
Minimum Qty (MOQ):	100
NSN:	5320-00-369-3472
Schedule B:	7318.23.0000
ECCN:	EAR99
National Motor Freight:	106510, Rivets I / S Plain / Galvanized Etc

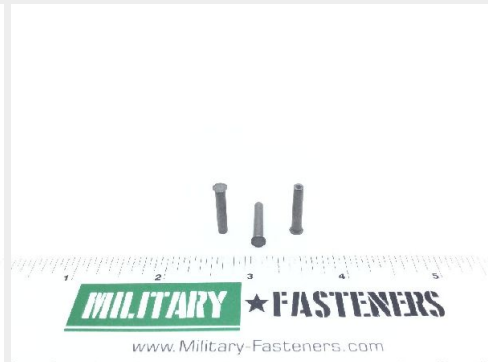

* See page 2 for technical characteristics

P/N NAS1200-4-11 Specifications

Fastener Length:	0.678 Inches Minimum And 0.698 Inches Maximum
Head Style:	Flush (flat) Countersunk (included Angle - Less Than 135 Deg W Or W/o Chamfer)
Shank Diameter:	0.124 Inches Minimum And 0.128 Inches Maximum
Shank Style:	Tapered Hollow
Head Major Diameter:	0.174 Inches Minimum And 0.196 Inches Maximum
Shank End Hole Diameter:	0.070 Inches Nominal
Hole Depth:	0.035 Inches Nominal
Shear Strength:	90000 Single Pounds Per Square Inch
Countersink Angle:	99.0 Degrees Minimum And 101.0 Degrees Maximum
Material:	Iron Alloy 660 Overall
Material Document And Classification:	Ams 5737 Assn Std Single Material Response Overall
Surface Treatment:	Passivate Overall
Surface Treatment Document And Classification:	Qq-p-35 Fed Spec Single Treatment Response Overall
Specification/standard Data:	80205-nas1200 Professional/Industrial Association Standard

How to Order

Order this solid rivet from our inventory online by visiting <https://military-fasteners.com/rivets/solid+rivets/NAS1200-4-11> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.