


Description

Fastener Length: 11/16", Thread: 1/4-28, Thread Length: 27/64

* Manufacturer certifications are shipped with your order FREE of charge[Order this part online](#)**Additional Information**

SKU / Model:	NAS1221R4E4
Minimum Qty (MOQ):	10
NSN:	5305-01-365-1910
Schedule B:	7318.15.8085
ECCN:	EAR99
National Motor Freight:	096640, Screws, Iron Or Steel

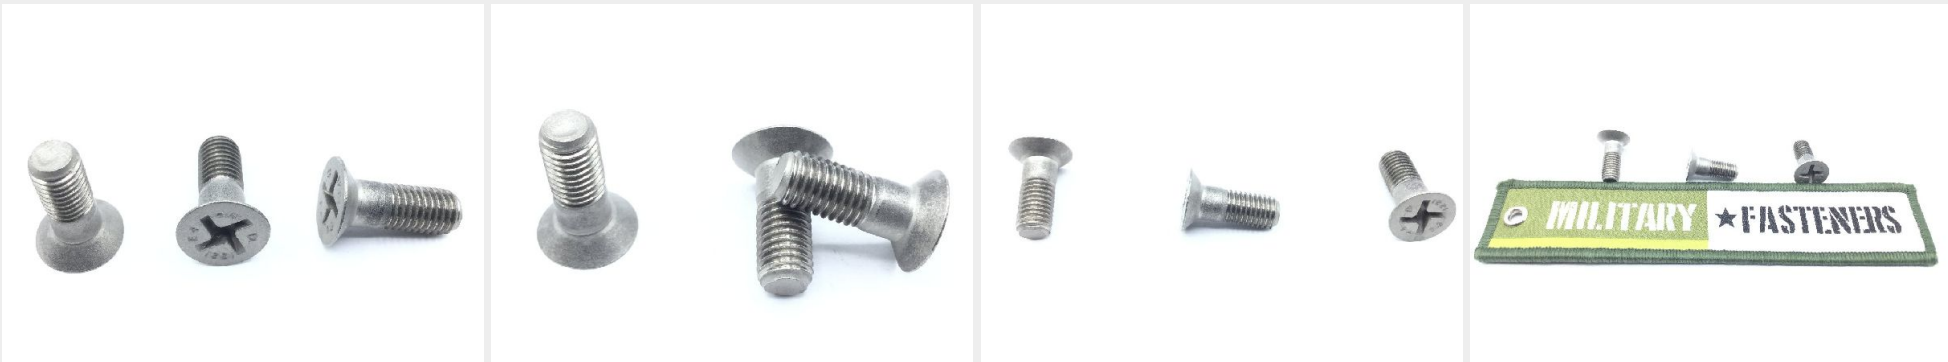

* See page 2 for technical characteristics

P/N NAS1221R4E4 Specifications

Thread Class:	3a
Thread Direction:	Right-hand
Thread Length:	0.425 Inches Nominal
Fastener Length:	0.661 Inches Minimum And 0.691 Inches Maximum
Head Style:	Flat Countersunk
Head Diameter:	0.461 Inches Minimum And 0.507 Inches Maximum
Internal Drive Style:	Torque-set Ribbed
Nominal Thread Diameter:	0.250 Inches
Thread Quantity Per Inch:	28
Minimum Tensile Strength:	160000 Pounds Per Square Inch
Countersink Angle:	99.0 Degrees Minimum And 101.0 Degrees Maximum
iii Part Name Assigned By Controlling Agency:	Navy Special Project
Screw Material:	Iron Alloy 660
Screw Material Document And Classification:	Ama5731 Assn Std Single Material Response Or Ama5732 Assn Std Single Material Response Or Ams5737 Assn Std Single Material Response
Screw Surface Treatment:	Passivate
Screw Surface Treatment Document And Classification:	Qq-p-35 Fed Spec Single Treatment Response
Thread Series Designator:	Unjf
Specification/standard Data:	80205-nas1221 Professional/industrial Association Standard

How to Order

Order this close tolerance bolt from our inventory online by visiting <https://military-fasteners.com/bolts/close+tolerance+bolts/NAS1221R4E4> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.