

Description


Fastener Length: 3/4", roughly 270 pieces per pound, NAS1242 series rivet

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	NAS1242AD613
Minimum Qty (MOQ):	1 Pound
NSN:	5320-01-521-6421
Schedule B:	7616.10.3000
ECCN:	EAR99
National Motor Freight:	096320, Rivets I / S Nickel Plated Buffed

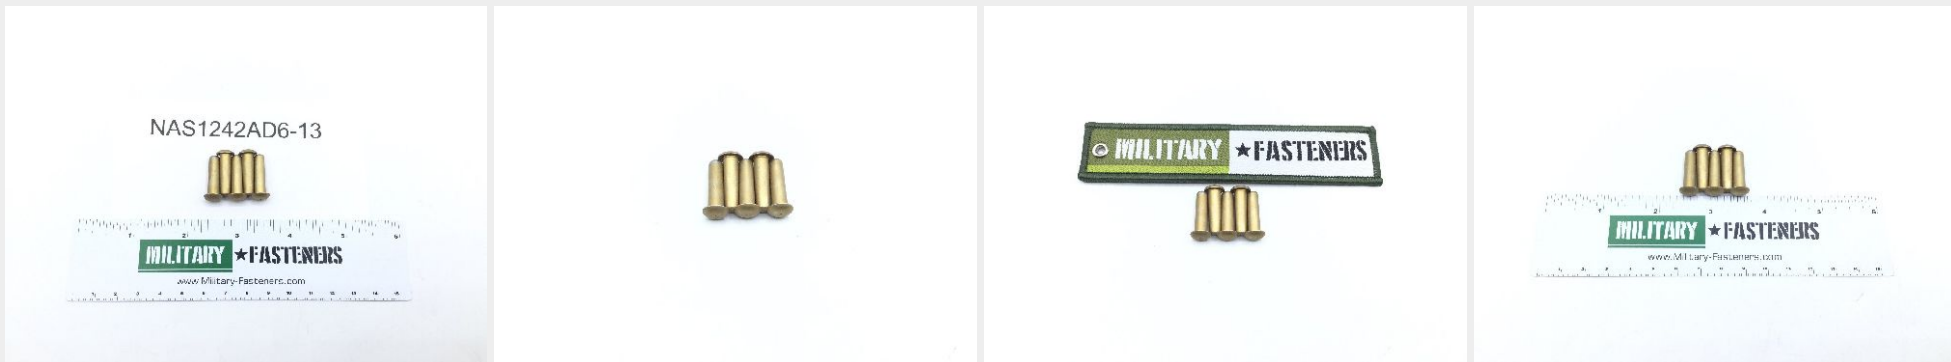

* See page 2 for technical characteristics

P/N NAS1242AD6-13 Specifications

Fastener Length:	0.802 Inches Minimum And 0.822 Inches Maximum
Head Style:	Universal
Head Height:	0.080 Inches Minimum And 0.090 Inches Maximum
Shank Diameter:	0.218 Inches Minimum And 0.223 Inches Maximum
Shank Style:	Straight W/radius Chamfered Tip
Head Major Diameter:	0.356 Inches Minimum And 0.394 Inches Maximum
End Item Identification:	C-135 Aircraft
Shear Strength:	26000 Single Pounds Per Square Inch
Material:	Aluminum Alloy 2117 Overall
Material Document And Classification:	Baqq-a-430 Fed Spec Single Material Response Overall
Surface Treatment:	Aluminum Alloy Overall
Surface Treatment Document And Classification:	Dbmil-c-8625 Mil Spec Single Treatment Response Overall

How to Order

Order this solid rivet from our inventory online by visiting <https://military-fasteners.com/rivets/solid+rivets/NAS1242AD6-13> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.