

**Description**


size: 5/16" thickness 0.032", aluminum alloy, NAS1252 series washer

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information**

SKU / Model:	NAS1252516L
Minimum Qty (MOQ):	100
NSN:	5310-00-066-4075
Schedule B:	7616.10.9090
ECCN:	EAR99
National Motor Freight:	194120, Washers / Gaskets / Pckg Dvcs Noi

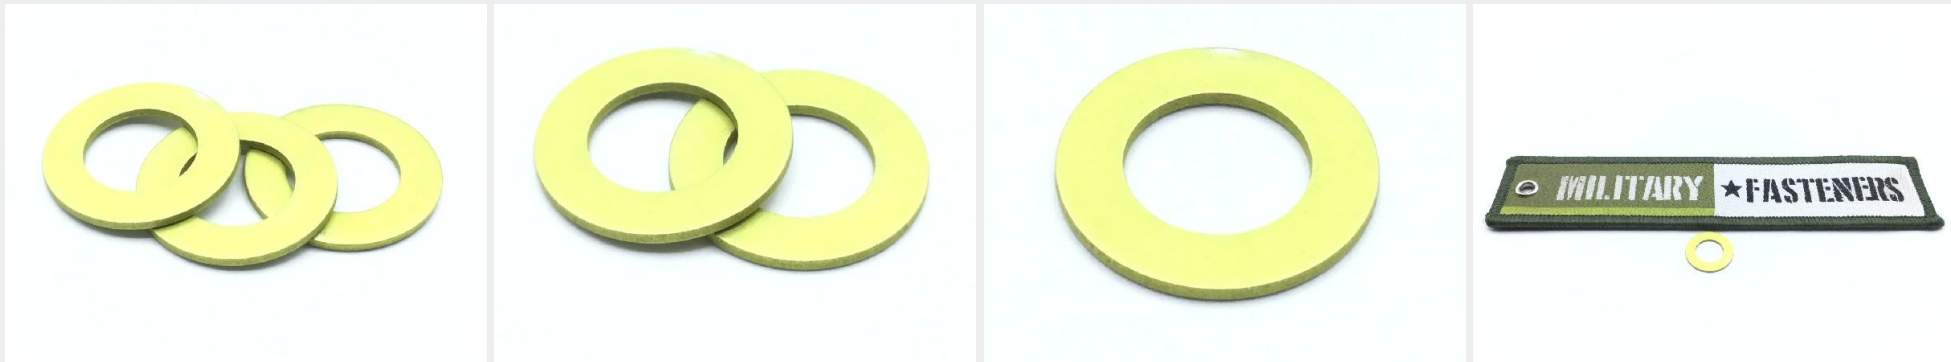

\* See page 2 for technical characteristics

## P/N NAS1252-516L Specifications

<b>Cross-sectional Shape Style:</b>	Rectangular
<b>Hole Diameter:</b>	0.318 Inches Minimum And 0.338 Inches Maximum
<b>Peripheral Shape Style:</b>	Round
<b>Center Hole Shape Style:</b>	1 Round
<b>Center Hole Shape Style:</b>	Round
<b>Thickness:</b>	0.028 Inches Minimum And 0.036 Inches Maximum
<b>Overall Diameter:</b>	0.557 Inches Minimum And 0.582 Inches Maximum
<b>Material:</b>	Aluminum Alloy 7075 Overall
<b>Material Document And Classification:</b>	Qq-a-250/12,temper T6 Fed Spec Single Material Response Overall
<b>Surface Treatment:</b>	Anodize Overall
<b>Surface Treatment Document And Classification:</b>	Mil-a-8625,ty 2,cl 1 Mil Spec Single Treatment Response Overall
<b>Specification/standard Data:</b>	80205-nas1252 Professional/industrial Association Standard

## How to Order

Order this flat washer from our inventory online by visiting <https://military-fasteners.com/washers/flat+washers/NAS1252-516L> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.