

Description


Hole Diameter: 37/64", Diameter: 1-5/64", Thickness: 1/16", NAS1252 series washer

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

| | |
|-------------------------|---|
| SKU / Model: | NAS1252916H |
| Minimum Qty (MOQ): | 100 |
| NSN: | 5310-01-128-6058 |
| Schedule B: | 7616.10.9090 |
| ECCN: | EAR99 |
| National Motor Freight: | 194120, Washers / Gaskets / Pckg Dvcs Noi |

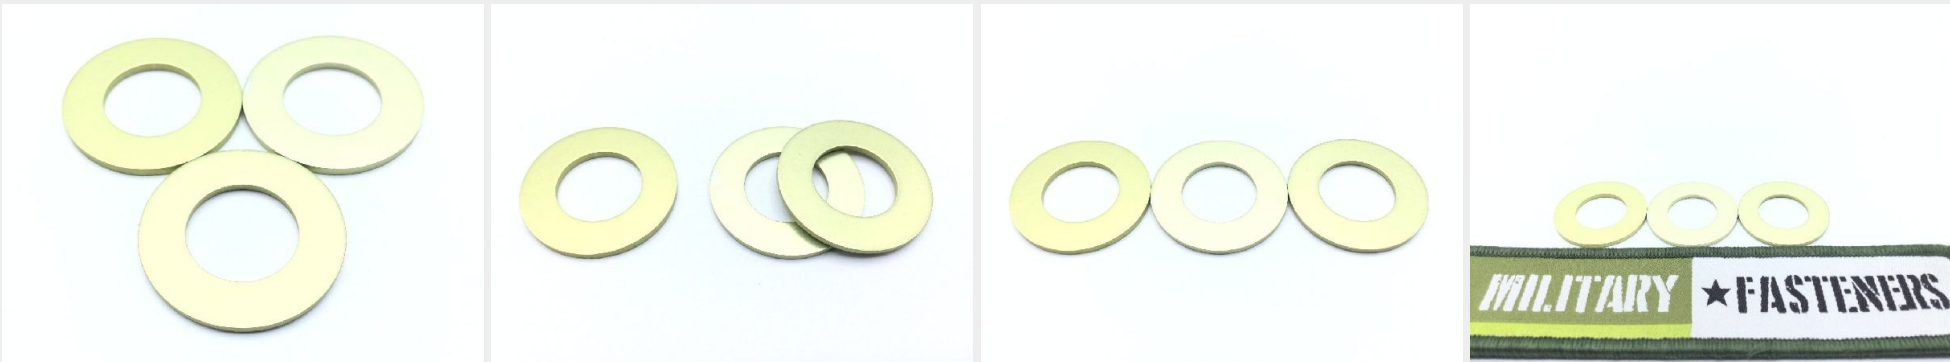

P/N NAS1252-916H Specifications

| | |
|---|--|
| Cross-sectional Shape Style: | Rectangular |
| Hole Diameter: | 0.568 Inches Minimum And 0.588 Inches Maximum |
| Peripheral Shape Style: | Round |
| Center Hole Shape Style: | 1 Round |
| Thickness: | 0.057 Inches Minimum And 0.069 Inches Maximum |
| Overall Diameter: | 1.057 Inches Minimum And 1.082 Inches Maximum |
| Color: | Yellow Overall |
| Material: | Aluminum Alloy 7075 Overall |
| Material Document And Classification: | Qq-a-250/12,t6 Fed Spec Single Material Response Overall |
| Surface Treatment: | Anodize Overall |
| Surface Treatment Document And Classification: | Mil-a-8625,type 2 Mil Spec Single Treatment Response Overall |
| Specification/standard Data: | 80205-nas1252 Professional/Industrial Association Standard |

How to Order

Order this flat washer from our inventory online by visiting <https://military-fasteners.com/washers/flat+washers/NAS1252-916H> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.