


Description

Fastener Length: 1-11/64", Thread: 1/4-24, Thread Length: 7/16

* Manufacturer certifications are shipped with your order FREE of charge[Order this part online](#)**Additional Information**

SKU / Model:	NAS130511
Minimum Qty (MOQ):	50
NSN:	5306-00-687-3280
Schedule B:	7318.15.8085
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

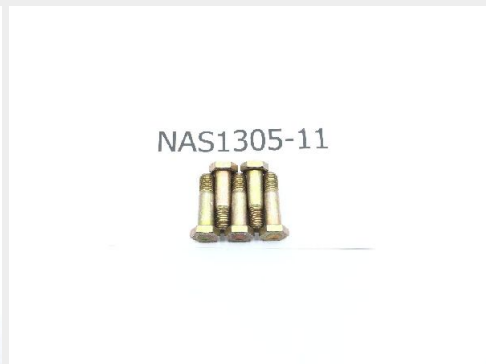

P/N NAS1305-11 Specifications

Thread Class:	3a
Thread Direction:	Right-hand
Thread Length:	0.394 Inches Minimum And 0.444 Inches Maximum
Fastener Length:	1.142 Inches Minimum And 1.172 Inches Maximum
Head Style:	Dished Hexagon
Head Height:	0.156 Inches Minimum And 0.181 Inches Maximum
Width Between Flats:	0.492 Inches Minimum And 0.502 Inches Maximum
Grip Diameter:	0.3110 Inches Minimum And 0.3120 Inches Maximum
Nominal Thread Diameter:	0.312 Inches
Grip Length:	0.678 Inches Minimum And 0.698 Inches Maximum
Thread Quantity Per Inch:	24
Minimum Tensile Strength:	160000 Pounds Per Square Inch
Hardness Rating:	36.0 Rockwell C Minimum Overall And 40.0 Rockwell C Maximum Overall
Material:	Steel Comp E4340 Overall Or Steel Comp 4140 Overall Or Steel Comp 8740 Overall Or Steel Comp 8735 Overall Or Steel Comp 6150 Overall Or Steel Comp 4340 Overall
Surface Treatment:	Cadmium Overall And Chromate Overall
Surface Treatment Document And Classification:	Qq-p-416,ty 2 Cl 2 Fed Spec Single Treatment Response Overall
Thread Series Designator:	Unjf
Specification/standard Data:	80205-nas1305 Professional/industrial Association Standard

How to Order

Order this machine bolt from our inventory online by visiting <https://military-fasteners.com/bolts/machine+bolts/NAS1305-11> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.