


Description

Fastener Length: 1-31/32", Thread: 1/4-24, Thread Length: 15/32

* Manufacturer certifications are shipped with your order FREE of charge[Order this part online](#)**Additional Information****Alternate Part Numbers**[NAS6605-24](#)

| | |
|-------------------------|---|
| SKU / Model: | NAS130524 |
| Minimum Qty (MOQ): | 10 |
| NSN: | 5306-00-054-8513 |
| Schedule B: | 7318.15.8085 |
| ECCN: | EAR99 |
| National Motor Freight: | 093486, Bolts,nuts Or Screws, Noi (sub 3) |

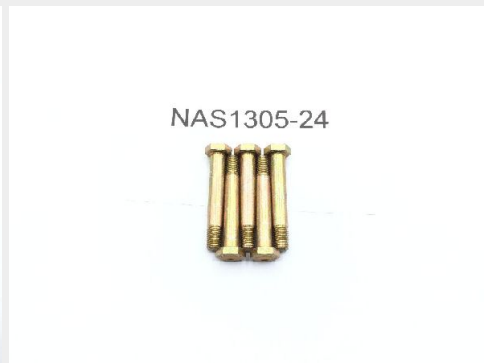

* See page 2 for technical characteristics

P/N NAS1305-24 Specifications

| | |
|---|---|
| Thread Class: | 3a |
| Thread Direction: | Right-hand |
| Thread Length: | 0.469 Inches Minimum |
| Fastener Length: | 1.969 Inches Nominal |
| Head Style: | Dished Hexagon |
| Head Height: | 0.156 Inches Nominal |
| Width Between Flats: | 0.492 Inches Minimum And 0.502 Inches Maximum |
| Grip Diameter: | 0.3110 Inches Minimum And 0.3120 Inches Maximum |
| Nominal Thread Diameter: | 0.312 Inches |
| Grip Length: | 1.500 Inches Nominal |
| Thread Quantity Per Inch: | 24 |
| Minimum Tensile Strength: | 160000 Pounds Per Square Inch |
| Hardness Rating: | 36.0 Rockwell C Minimum Overall And 40.0 Rockwell C Maximum Overall |
| Material: | Steel Comp 6150 Overall |
| Surface Treatment: | Cadmium Overall And Chromate Overall |
| Surface Treatment Document And Classification: | Qq-p-416,ty 2 Cl 2 Fed Spec Single Treatment Response Overall |
| Thread Series Designator: | Unf |
| Specification/standard Data: | 80205-nas1305 Professional/industrial Association Standard |

How to Order

Order this machine bolt from our inventory online by visiting <https://military-fasteners.com/bolts/machine+bolts/NAS1305-24> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.