

Description


Fastener Length: 2-21/64", Thread: 3/8-24, Thread Length: 19/32", NAS1306 series bolt

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	NAS130628
Minimum Qty (MOQ):	10
NSN:	5306-00-936-2418
Schedule B:	7318.15.8085
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

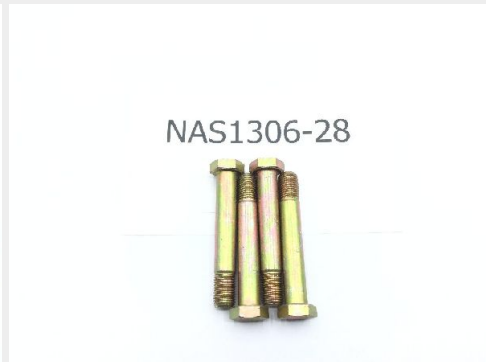

P/N NAS1306-28 Specifications

Thread Class:	3a
Thread Direction:	Right-hand
Thread Length:	0.573 Inches Minimum And 0.603 Inches Maximum
Fastener Length:	2.313 Inches Minimum And 2.343 Inches Maximum
Head Style:	Dished Hexagon
Head Height:	0.188 Inches Minimum And 0.203 Inches Maximum
Width Between Flats:	0.553 Inches Minimum And 0.564 Inches Maximum
Grip Diameter:	0.3735 Inches Minimum And 0.3745 Inches Maximum
Nominal Thread Diameter:	0.375 Inches
Grip Length:	1.740 Inches Minimum And 1.760 Inches Maximum
Thread Quantity Per Inch:	24
Minimum Tensile Strength:	160000 Pounds Per Square Inch
Hardness Rating:	36.0 Rockwell C Minimum Overall And 40.0 Rockwell C Maximum Overall
Material:	Steel Comp E4340 Overall Or Steel Comp 4340 Overall Or Steel Comp 8740 Overall Or Steel Comp 8735 Overall Or Steel Comp 6150 Overall Or Steel Comp 4140 Overall
Surface Treatment:	Cadmium Overall And Chromate Overall
Surface Treatment Document And Classification:	Qq-p-416,ty 2 Cl 2 Fed Spec Single Treatment Response Overall
Thread Series Designator:	Unjf
Specification/standard Data:	80205-nas1306 Professional/industrial Association Standard

How to Order

Order this machine bolt from our inventory online by visiting <https://military-fasteners.com/bolts/machine+bolts/NAS1306-28> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.