

**Description**


Fastener Length: 2-27/32", Thread: 3/8-20, Thread Length: 19/32

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information**

SKU / Model:	NAS130736D
Minimum Qty (MOQ):	2
NSN:	5306-01-515-4548
Schedule B:	7318.15.2000
ECCN:	EAR99

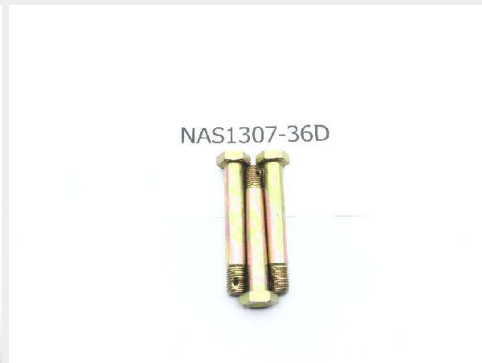

\* See page 2 for technical characteristics

## P/N NAS1307-36D Specifications

<b>Thread Class:</b>	3a
<b>Thread Direction:</b>	Right-hand
<b>Thread Length:</b>	0.594 Inches Nominal
<b>Fastener Length:</b>	2.844 Inches Nominal
<b>Head Style:</b>	Dished Hexagon
<b>Head Height:</b>	0.219 Inches Minimum And 0.234 Inches Maximum
<b>Width Between Flats:</b>	0.679 Inches Minimum And 0.690 Inches Maximum
<b>Grip Diameter:</b>	0.436 Inches Minimum And 0.437 Inches Maximum
<b>Shank Unthreaded Hole Diameter:</b>	0.106 Inches Nominal First Hole
<b>Nominal Thread Diameter:</b>	0.437 Inches
<b>Grip Length:</b>	2.240 Inches Minimum And 2.260 Inches Maximum
<b>Thread Quantity Per Inch:</b>	20
<b>Minimum Tensile Strength:</b>	160000 Pounds Per Square Inch
<b>Distance From Head Largest Bearing Surface To Shank Hole Center:</b>	2.644 Inches Nominal First Hole
<b>Material:</b>	Steel Comp 4340 Overall Or Steel Comp 8740 Overall
<b>Material Document And Classification:</b>	Ams6415 Assn Std 1st Material Response Overall Or Ams6322 Assn Std 2nd Material Response Overall Or Mil-s-6049 Mil Spec 2nd Material Response Overall
<b>Surface Treatment:</b>	Cadmium Overall
<b>Surface Treatment Document And Classification:</b>	Qq-p-416, Tyii, Cl2 Fed Spec Single Treatment Response Overall
<b>Thread Series Designator:</b>	Unjf

## How to Order

Order this shear bolt from our inventory online by visiting <https://military-fasteners.com/bolts/shear+bolts/NAS1307-36D> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.