

Description


Length: 1", thread: 1/4-28, socket head, drilled head, cadmium plated alloy steel, NAS1351 series screw

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	NAS13514H16P
Minimum Qty (MOQ):	10
NSN:	5305-00-771-4742
Schedule B:	7318.15.6080
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

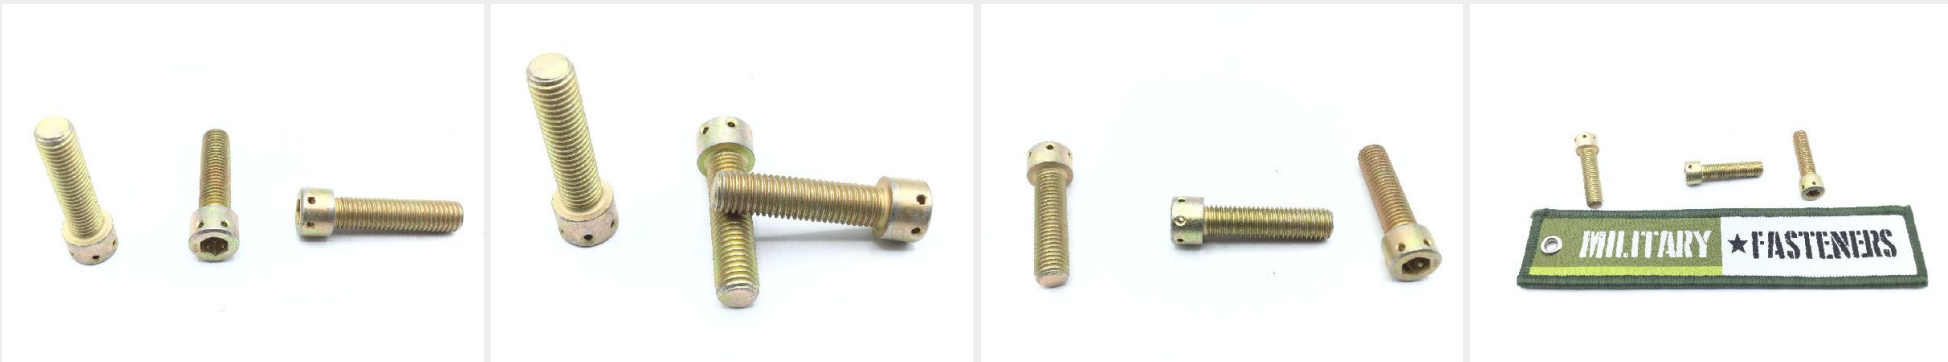

* See page 2 for technical characteristics

P/N NAS1351-4H16P Specifications

Thread Class:	3a
Thread Direction:	Right-hand
Thread Length:	1.000 Inches Minimum
Fastener Length:	1.000 Inches Nominal
Head Style:	Flat Chamfer
Head Diameter:	0.365 Inches Minimum And 0.375 Inches Maximum
Head Height:	0.244 Inches Minimum And 0.250 Inches Maximum
Hole Diameter:	0.062 Inches Nominal
Internal Drive Style:	Hexagon
Nominal Thread Diameter:	0.250 Inches
Width Across Flats:	0.187 Inches Minimum And 0.190 Inches Maximum
Hole Quantity:	6
Hole Type:	Drilled
Thread Quantity Per Inch:	28
Minimum Tensile Strength:	160000 Pounds Per Square Inch
Hardness Rating:	36.0 Rockwell C Minimum Overall And 43.0 Rockwell C Maximum Overall
Minimum Yield Strength:	130000 Pounds Per Square Inch
Hole Configuration Style:	Round Internal Hexagon
Material:	Steel Overall
Surface Treatment:	Cadmium Overall And Chromate Overall
Surface Treatment Document And Classification:	Ams-qq-p-416, Ty 2, Cl 2 Fed Spec Single Treatment Response Overall
Thread Series Designator:	Unf
Specification/standard Data:	80205-nas1351 Professional/industrial Association Standard

How to Order

Order this socket head cap screw from our inventory online by visiting <https://military-fasteners.com/screws/socket+head+cap+screws/NAS1351-4H16P> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.