



★ FASTENERS

Military-Fasteners.com

P/N NAS1351-6H24P

Description


Fastener Length: 1-1/2", Hole Diameter: 1/16", Thread: 3/8-24, Head Width: 5/16", Thread Length: 1-1/4",

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	NAS13516H24P
Minimum Qty (MOQ):	5
NSN:	5305-01-298-3016
Schedule B:	7318.15.6080
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

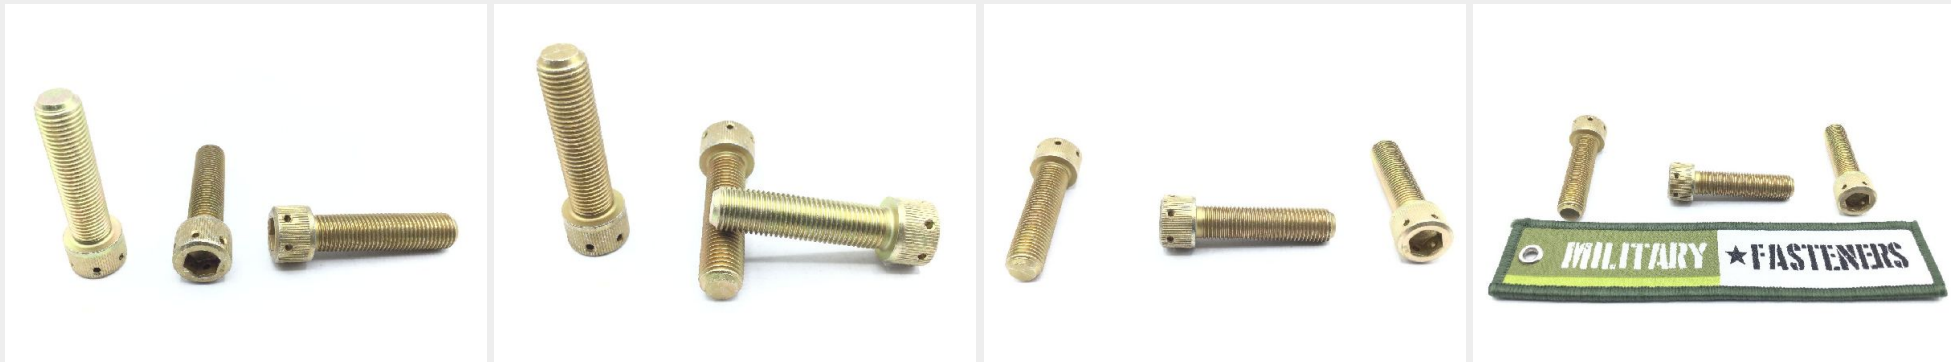

* See page 2 for technical characteristics

P/N NAS1351-6H24P Specifications

Thread Class:	3a
Thread Direction:	Right-hand
Thread Length:	1.250 Inches Minimum
Fastener Length:	1.440 Inches Minimum And 1.500 Inches Maximum
Head Style:	Flat Chamfer
Head Diameter:	0.550 Inches Minimum And 0.562 Inches Maximum
Head Height:	0.368 Inches Minimum And 0.375 Inches Maximum
Hole Diameter:	0.061 Inches Minimum And 0.067 Inches Maximum
Internal Drive Style:	Hexagon
Nominal Thread Diameter:	0.375 Inches
Width Across Flats:	0.312 Inches Minimum And 0.316 Inches Maximum
Hole Quantity:	6
Hole Type:	Drilled
Thread Quantity Per Inch:	24
Minimum Tensile Strength:	170000 Pounds Per Square Inch
Hardness Rating:	38.0 Rockwell C Minimum Overall And 45.0 Rockwell C Maximum Overall
Minimum Yield Strength:	150000 Pounds Per Square Inch
Hole Configuration Style:	Round Internal Hexagon
Material:	Steel Overall
Surface Treatment:	Cadmium Overall And Chromate Overall
Surface Treatment Document And Classification:	Qq-p-416,ty 2,cl 2 Fed Spec Single Treatment Response Overall
Thread Series Designator:	Unrf
Specification/standard Data:	80205-nas1351 Professional/industrial Association Standard

How to Order

Order this socket head cap screw from our inventory online by visiting <https://military-fasteners.com/screws/socket+head+cap+screws/NAS1351-6H24P> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.