

**Description**


length: 3/4", thread: 6-32, socket head screw, black oxide finish alloy steel

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information**

SKU / Model:	NAS13520612
Minimum Qty (MOQ):	50
NSN:	5305-00-092-6800
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

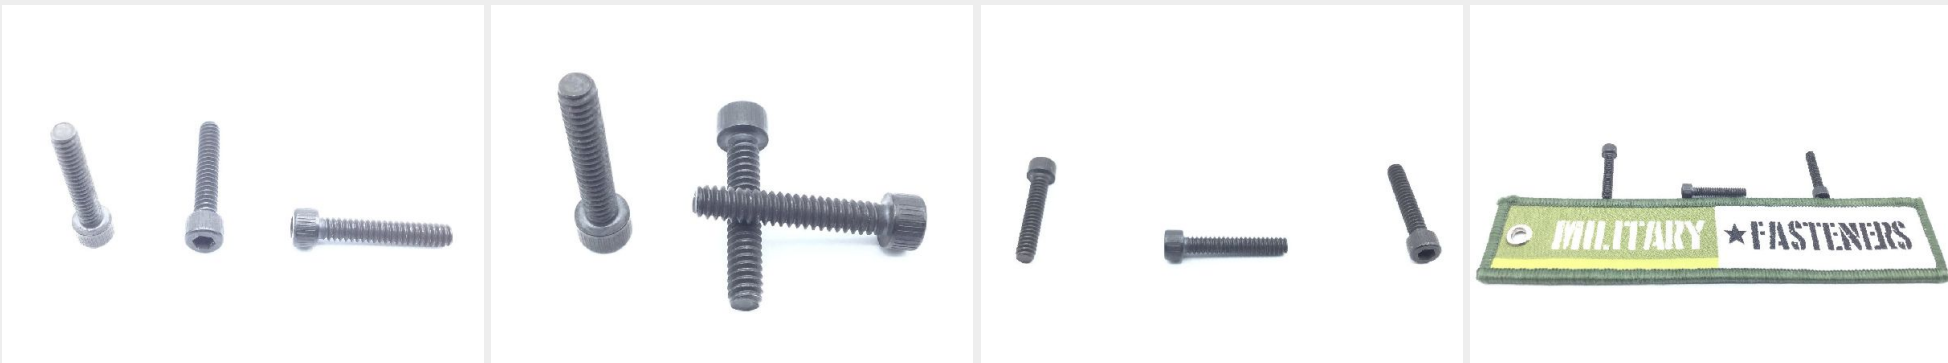

## P/N NAS1352-06-12 Specifications

<b>Thread Class:</b>	3a
<b>Thread Direction:</b>	Right-hand
<b>Fastener Length:</b>	0.734 Inches Minimum And 0.766 Inches Maximum
<b>Head Diameter:</b>	0.218 Inches Minimum And 0.226 Inches Maximum
<b>Head Height:</b>	0.134 Inches Minimum And 0.138 Inches Maximum
<b>Nominal Thread Diameter:</b>	0.138 Inches
<b>Width Across Flats:</b>	0.109 Inches Minimum And 0.111 Inches Maximum
<b>Thread Quantity Per Inch:</b>	32
<b>Minimum Tensile Strength:</b>	180000 Pounds Per Square Inch
<b>Hardness Rating:</b>	38.0 Rockwell C Minimum Overall And 45.0 Rockwell C Maximum Overall
<b>Minimum Yield Strength:</b>	155000 Pounds Per Square Inch
<b>Material:</b>	Steel Overall
<b>Surface Treatment:</b>	Oxide Overall
<b>Surface Treatment Document And Classification:</b>	Mil-c-13924,cl 1 Mil Spec Single Treatment Response Overall
<b>Specification/standard Data:</b>	80205-nas1352 Professional/industrial Association Standard

## How to Order

Order this socket head cap screw from our inventory online by visiting <https://military-fasteners.com/screws/socket+head+cap+screws/NAS1352-06-12> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.