

**Description**


length: 3/8", thread: 6-32, socket head, black oxide finish alloy steel, black oxide, NAS1352 series screw

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information**

|                         |   |
|-------------------------|---|
| SKU / Model:            | NAS1352066                                |
| Minimum Qty (MOQ):      | 50  |
| NSN:                    | 5305-00-959-5316                          |
| Schedule B:             | 7318.15.6080                              |
| ECCN:                   | EAR99                                     |
| National Motor Freight: | 093486, Bolts,nuts Or Screws, Noi (sub 3) |

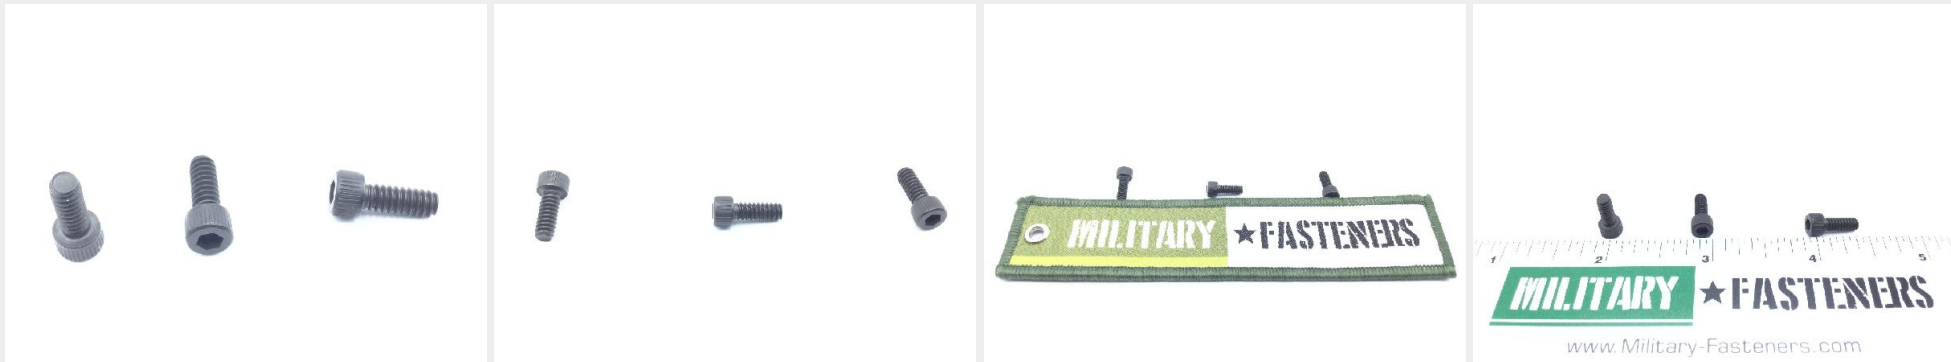

\* See page 2 for technical characteristics

## P/N NAS1352-06-6 Specifications

|                                     |   |
|-------------------------------------|---|
| <b>Thread Class:</b>                | 3a  |
| <b>Thread Direction:</b>            | Right-hand  |
| <b>Thread Length:</b>               | 0.283 Inches Minimum And 0.375 Inches Maximum                       |
| <b>Fastener Length:</b>             | 0.345 Inches Minimum And 0.375 Inches Maximum                       |
| <b>Head Style:</b>                  | Flat Chamfer  |
| <b>Head Diameter:</b>               | 0.128 Inches Minimum And 0.226 Inches Maximum                       |
| <b>Head Height:</b>                 | 0.134 Inches Minimum And 0.138 Inches Maximum                       |
| <b>Internal Drive Style:</b>        | Hexagon   |
| <b>Nominal Thread Diameter:</b>     | 0.138 Inches  |
| <b>Width Across Flats:</b>          | 0.109 Inches Minimum And 0.111 Inches Maximum                       |
| <b>Thread Quantity Per Inch:</b>    | 32  |
| <b>Minimum Tensile Strength:</b>    | 180000 Pounds Per Square Inch                                       |
| <b>Hardness Rating:</b>             | 38.0 Rockwell C Minimum Overall And 45.0 Rockwell C Maximum Overall |
| <b>Minimum Yield Strength:</b>      | 130000 Pounds Per Square Inch                                       |
| <b>Color:</b>                       | Black Overall   |
| <b>Material:</b>                    | Steel Overall   |
| <b>Surface Treatment:</b>           | Oxide Overall Or Zinc Overall                                       |
| <b>Thread Series Designator:</b>    | Unc   |
| <b>Nondefinitive Spec/std Data:</b> | 4 Type  |

## How to Order

Order this socket head cap screw from our inventory online by visiting <https://military-fasteners.com/screws/socket+head+cap+screws/NAS1352-06-6> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.