



MILITARY ★ FASTENERS

Military-Fasteners.com

P/N NAS1352-4-12

Description


length: 3/4", thread: 1/4-20, socket head, black oxide finish, alloy steel, NAS1352 series screw

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	NAS1352412
Minimum Qty (MOQ):	20
NSN:	5305-00-310-4980
Schedule B:	7318.15.6080
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

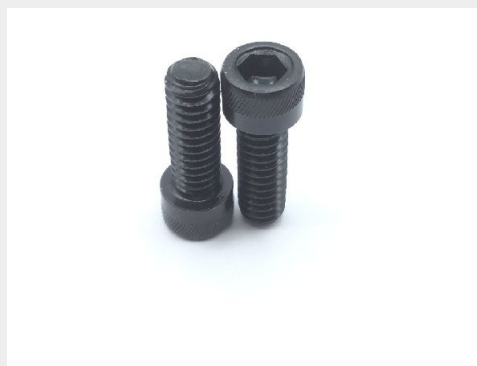

* See page 2 for technical characteristics

P/N NAS1352-4-12 Specifications

Thread Class:	3a
Thread Direction:	Right-hand
Thread Length:	0.620 Inches Minimum And 0.750 Inches Maximum
Fastener Length:	0.720 Inches Minimum And 0.750 Inches Maximum
Head Style:	Flat Chamfer
Head Diameter:	0.365 Inches Minimum And 0.375 Inches Maximum
Head Height:	0.244 Inches Minimum And 0.250 Inches Maximum
Internal Drive Style:	Hexagon
End Item Identification:	Mrap Rg-33
Nominal Thread Diameter:	0.250 Inches
Width Across Flats:	0.187 Inches Minimum And 0.190 Inches Maximum
Thread Quantity Per Inch:	20
Minimum Tensile Strength:	170000 Pounds Per Square Inch
Hardness Rating:	38.0 Rockwell C Minimum Overall And 45.0 Rockwell C Maximum Overall
Minimum Yield Strength:	150000 Pounds Per Square Inch
Color:	Black Overall
Material:	Steel Overall
Material Document And Classification:	66 Fed Std Single Material Response Overall
Surface Treatment:	Oxide Overall
Surface Treatment Document And Classification:	Mil-c-13924,cl 1 Mil Spec Single Treatment Response Overall
Thread Series Designator:	Unrc
Specification/standard Data:	80205-nas1352 Professional/industrial Association Standard

How to Order

Order this socket head cap screw from our inventory online by visiting <https://military-fasteners.com/screws/socket+head+cap+screws/NAS1352-4-12> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.