

## Description


Fastener Length: 3/4", Hole Diameter: 3/64", Thread: 1/4-20, Head Width: 3/16", Thread Length: 3/4

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

## Additional Information

SKU / Model:	NAS1352C4H12
Minimum Qty (MOQ):	10
NSN:	5305-01-108-0650
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

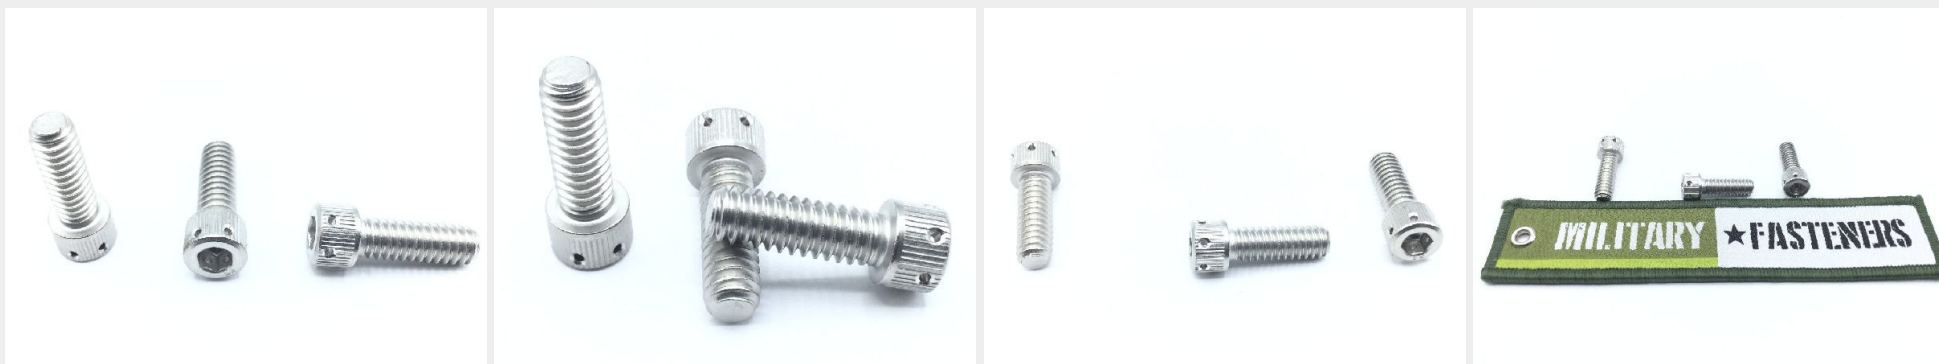

## P/N NAS1352C4H12 Specifications

<b>Thread Class:</b>	3a
<b>Thread Direction:</b>	Right-hand
<b>Thread Length:</b>	0.620 Inches Minimum And 0.750 Inches Maximum
<b>Fastener Length:</b>	0.720 Inches Minimum And 0.750 Inches Maximum
<b>Head Style:</b>	Flat Chamfer
<b>Head Diameter:</b>	0.365 Inches Minimum And 0.375 Inches Maximum
<b>Head Height:</b>	0.244 Inches Minimum And 0.250 Inches Maximum
<b>Hole Diameter:</b>	0.047 Inches Nominal
<b>Internal Drive Style:</b>	Hexagon
<b>Nominal Thread Diameter:</b>	0.250 Inches
<b>Width Across Flats:</b>	0.188 Inches Minimum And 0.190 Inches Maximum
<b>Hole Quantity:</b>	6
<b>Hole Type:</b>	Drilled
<b>Thread Quantity Per Inch:</b>	20
<b>Minimum Tensile Strength:</b>	80000 Pounds Per Square Inch
<b>Hardness Rating:</b>	80.0 Rockwell B Minimum Overall
<b>Minimum Yield Strength:</b>	30000 Pounds Per Square Inch
<b>Hole Configuration Style:</b>	Round Internal Hexagon
<b>Material:</b>	Steel Comp 302 Overall Or Steel Comp 304 Overall Or Steel Comp 305 Overall Or Steel Comp 316 Overall Or Steel Comp 384 Overall Or Steel Comp Xm-7 Overall
<b>Surface Treatment:</b>	Passivate Overall
<b>Surface Treatment Document And Classification:</b>	Qq-p-35 Fed Spec Single Treatment Response Overall
<b>Thread Series Designator:</b>	Unrc
<b>Specification/standard Data:</b>	80205-nas1352 Professional/industrial Association Standard

## How to Order

Order this socket head cap screw from our inventory online by visiting <https://military-fasteners.com/screws/socket+head+cap+screws/NAS1352C4H12> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.