



★ FASTENERS

Military-Fasteners.com

P/N NAS1448-06

Description


NAS1448 series pin

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	NAS144806
Minimum Qty (MOQ):	10
NSN:	5320-00-558-3775
ECCN:	EAR99
National Motor Freight:	106510, Rivets I / S Plain / Galvanized Etc

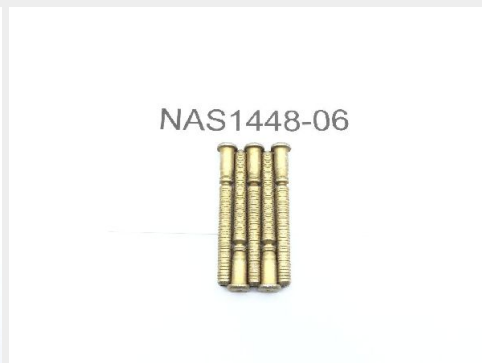

* See page 2 for technical characteristics

P/N NAS1448-06 Specifications

Fastener Length:	2.280 Inches Minimum And 2.480 Inches Maximum
Head Style:	Err-090
Head Height:	0.074 Inches Minimum And 0.081 Inches Maximum
Shank Diameter:	0.2480 Inches Minimum And 0.2495 Inches Maximum
Shank Style:	Pin-rivet, Multiple Grooved
Head Major Diameter:	0.363 Inches Minimum And 0.377 Inches Maximum
Lubrication:	Cetyl Alcohol
Grip Length:	0.313 Inches Minimum And 0.375 Inches Maximum
Features Provided:	Casehardened
Minimum Tensile Strength:	160000 Pounds Per Square Inch
Hardness Rating:	77.0 Rockwell Superficial 15-n Minimum Overall And 82.0 Rockwell Superficial 15-n Maximum Overall
Material:	Steel Comp 8740 Overall Or Steel Comp 4340 Overall Or Steel Comp 4140 Overall
Surface Treatment:	Cadmium Overall And Chromate Overall
Surface Treatment Document And Classification:	Qq-p-416,type 2,class 2 Fed Spec All Treatment Responses Overall
Specification/standard Data:	80205-nas1448 Professional/industrial Association Standard

How to Order

Order this pin-rivet from our inventory online by visiting https://military-fasteners.com/pins/pin_rivets/NAS1448-06 and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.