

**Description**


nom. size: 0.19", grip: 0.50", cadmium plated steel, protruding head, pull type

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information**

SKU / Model:	NAS146608
Minimum Qty (MOQ):	25
NSN:	5320-00-531-0715
ECCN:	EAR99
National Motor Freight:	106510, Rivets I / S Plain / Galvanized Etc

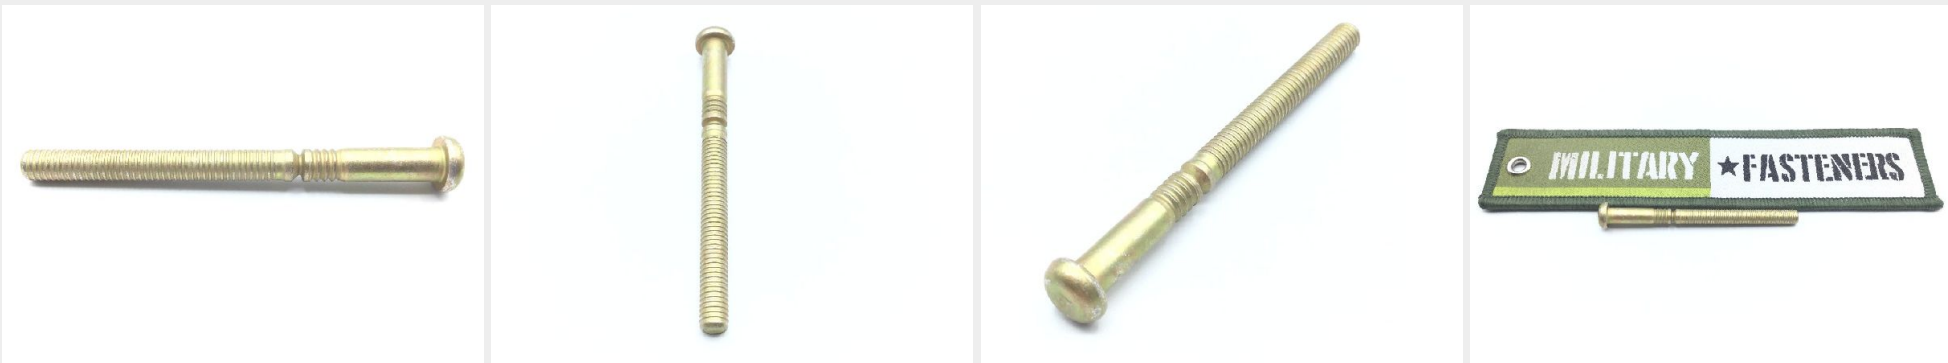

\* See page 2 for technical characteristics

## P/N NAS1466-08 Specifications

<b>Fastener Length:</b>	2.190 Inches Minimum And 2.390 Inches Maximum
<b>Head Style:</b>	Err-090
<b>Head Height:</b>	0.099 Inches Minimum And 0.111 Inches Maximum
<b>Shank Diameter:</b>	0.188 Inches Minimum And 0.190 Inches Maximum
<b>Shank Style:</b>	Pin-rivet, Multiple Grooved
<b>Head Major Diameter:</b>	0.297 Inches Minimum And 0.327 Inches Maximum
<b>Grip Length:</b>	0.470 Inches Minimum And 0.531 Inches Maximum
<b>Minimum Tensile Strength:</b>	160000 Pounds Per Square Inch
<b>Material:</b>	Steel Comp 4037 Overall Or Steel Comp 4140 Overall Or Steel Comp 8740 Overall
<b>Material Document And Classification:</b>	Qq-w-405 Fed Spec All Material Responses Overall
<b>Surface Treatment:</b>	Cadmium Overall
<b>Surface Treatment Document And Classification:</b>	Qq-p-416,ty 2,cl 3 Fed Spec Single Treatment Response Overall
<b>Specification/standard Data:</b>	80205-nas1466 Professional/Industrial Association Standard

## How to Order

Order this pin-rivet from our inventory online by visiting [https://military-fasteners.com/pins/pin\\_rivets/NAS1466-08](https://military-fasteners.com/pins/pin_rivets/NAS1466-08) and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.