



★ FASTENERS

Military-Fasteners.com

P/N NAS1474A4

Description


thread: 1/4-28, self-locking, capped, reduced rivet spacing, two lug, steel

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

| | |
|-------------------------|---|
| SKU / Model: | NAS1474A4 |
| Minimum Qty (MOQ): | 10 |
| NSN: | 5310-00-994-7209 |
| ECCN: | EAR99 |
| National Motor Freight: | 093486, Bolts,nuts Or Screws, Noi (sub 3) |

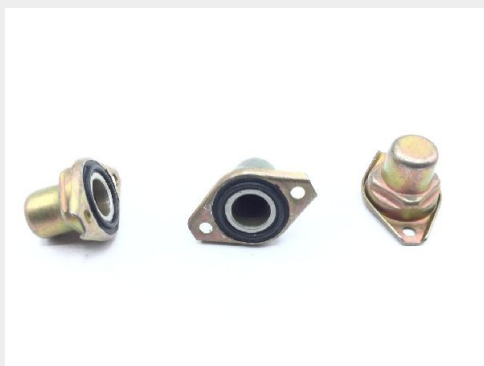

* See page 2 for technical characteristics

P/N NAS1474A4 Specifications

| | |
|--|--|
| Thread Class: | 3b |
| Thread Direction: | Right-hand |
| Locking Feature: | Prevailing Torque All Metal Design |
| Counterbore Diameter: | 0.280 Inches Minimum Nut |
| Lubrication: | Dry Film Lubricant |
| Overall Height: | 0.560 Inches Maximum |
| Mounting Hole Diameter: | 0.098 Inches Nominal |
| Nut Style: | Plate |
| Nut Length: | 1.000 Inches Maximum |
| Nut Height: | 0.350 Inches Maximum |
| Plate Thickness: | 0.030 Inches Maximum |
| Plate Width: | 0.635 Inches Maximum |
| Nut Counterbore Depth: | 0.105 Inches Minimum Nut |
| Nut Mounting Provision: | Straight Holes |
| Mounting Hole Arrangement Style: | 2 Holes |
| Distance From Aperture Center To Mounting Hole Center: | 0.371 Inches Minimum And 0.381 Inches Maximum |
| Center To Center Distance Between Mounting Holes Along Length: | 0.750 Inches Minimum And 0.754 Inches Maximum |
| Temp Rating: | -65.0 Deg Fahrenheit Minimum And 225.0 Deg Fahrenheit Maximum |
| Thread Series: | Unjf |
| Features Provided: | Floating Nut |
| Thread Quantity Per Inch: | 28 |
| Hardness Rating: | 60.0 Shore Durometer A Nominal |
| Nominal Thread Size: | 0.250 Inches |
| Material: | Aluminum Alloy Washer Or Steel Washer |
| Material: | Rubber Synthetic Seal |
| Material: | Steel Nut |
| Material: | Steel Shell |
| Material Document And Classification: | Mil-r-6855,class 1,grade 60 Mil Spec Single Material Response Seal |
| Surface Treatment: | Anodize Washer Or Cadmium Washer |
| Surface Treatment: | Cadmium Nut |

| | |
|---|---|
| Surface Treatment: | Cadmium Shell |
| Surface Treatment Document And Classification: | Mil-a-8625,type 1 Mil Spec 1st Treatment Response Washer Or Qq-p-416 Fed Spec 2nd Treatment Response Washer |
| Surface Treatment Document And Classification: | Qq-p-416,type 1,class 3 Fed Spec Single Treatment Response Nut |
| Surface Treatment Document And Classification: | Qq-p-416,type 1,class 3 Fed Spec Single Treatment Response Shell |
| Specification/standard Data: | 80205-nas1474 Professional/industrial Association Standard |

How to Order

Order this self-locking nutplate from our inventory online by visiting https://military-fasteners.com/nuts/self_locking+nutplates/NAS1474A4 and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.