


Description

Material: Aluminum, NAS1523AA series retainer

* Manufacturer certifications are shipped with your order FREE of charge[Order this part online](#)**Additional Information**

SKU / Model:	NAS1523AA6R
Minimum Qty (MOQ):	5
NSN:	5330-01-183-0962
Schedule B:	4016.99.6050
ECCN:	EAR99
National Motor Freight:	194120, Washers / Gaskets / Pckg Dvcs Noi

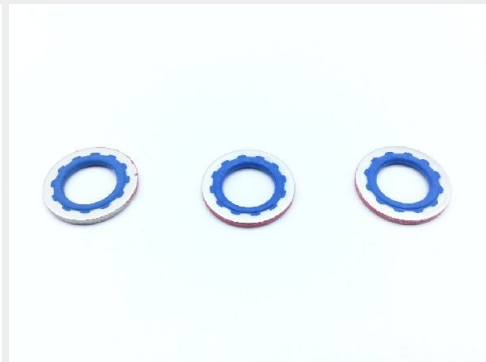

P/N NAS1523AA6R Specifications

Outside Diameter:	0.651 Inches Minimum And 0.676 Inches Maximum
Retainer Thickness:	0.045 Inches Minimum And 0.055 Inches Maximum
Packing Ring Cross-sectional Diameter:	0.067 Inches Minimum And 0.077 Inches Maximum
Packing Inside Diameter:	0.354 Inches Minimum And 0.374 Inches Maximum
Construction:	Solid
Special Features:	Color Red
Material:	Aluminum Alloy 7075 Retainer
Material:	Rubber Fluorosilicone Class Fq Packing
Material Document And Classification:	Mil-r-25988,ty 2,cl 1,gr 60 Mil Spec Single Material Response Packing
Material Document And Classification:	Qq-a-250/12,alloy 7075 T6 Fed Spec Single Material Response Retainer
Surface Treatment:	Anodize Retainer
Surface Treatment Document And Classification:	Mil-a-8625,ty 2,cl 1 Mil Spec Single Treatment Response Retainer Or Mil-a-8625,ty 2,cl 2 Mil Spec Single Treatment Response Retainer
Specification/standard Data:	80205-nas1523 Professional/industrial Association Standard

How to Order

Order this packing with retainer from our inventory online by visiting https://military-fasteners.com/o_rings/packing+with+retainers/NAS1523AA6R and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.