

Description


length: 0.487", thread: 10-32, shear, flush head, alloy steel, offset cruciform, NAS1580 series screw

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

| | |
|-------------------------|---|
| SKU / Model: | NAS1580A3T2 |
| Minimum Qty (MOQ): | 50 |
| NSN: | 5305-01-061-0739 |
| ECCN: | EAR99 |
| National Motor Freight: | 093486, Bolts,nuts Or Screws, Noi (sub 3) |

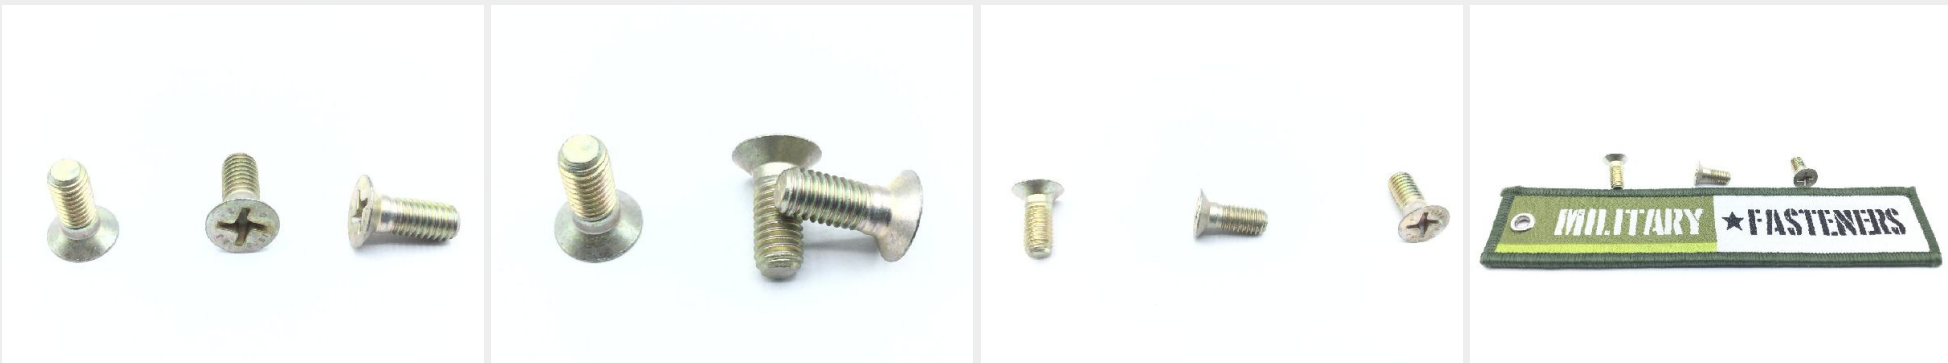

P/N NAS1580A3T2 Specifications

| | |
|---|--|
| Thread Class: | 3a |
| Thread Direction: | Right-hand |
| Thread Length: | 0.337 Inches Minimum And 0.387 Inches Maximum |
| Fastener Length: | 0.472 Inches Minimum And 0.502 Inches Maximum |
| Head Style: | Flat Countersunk |
| Head Diameter: | 0.339 Inches Minimum And 0.381 Inches Maximum |
| Grip Diameter: | 0.1885 Inches Minimum And 0.1895 Inches Maximum |
| Internal Drive Style: | Offset Cruciform (torque Set) |
| Nominal Thread Diameter: | 0.190 Inches |
| Grip Length: | 0.115 Inches Minimum And 0.135 Inches Maximum |
| Thread Quantity Per Inch: | 32 |
| Minimum Tensile Strength: | 160000 Pounds Per Square Inch |
| Hardness Rating: | 36.0 Rockwell C Minimum Overall And 40.0 Rockwell C Maximum Overall |
| Countersink Angle: | 100.0 Degrees Nominal |
| Surface Finish: | 32.0 Microinches Grip |
| Surface Finish: | 32.0 Microinches Threads |
| Material: | Steel Comp 4140 Overall Or Steel Comp E4340 Overall Or Steel Comp 6150 Overall Or Steel Comp 8735 Overall Or Steel Comp 8740 Overall |
| Surface Treatment: | Cadmium Overall And Chromate Overall |
| Surface Treatment Document And Classification: | Qq-p-416,type 2,class 2 Fed Spec Single Treatment Response Overall |
| Thread Series Designator: | Unjf |

How to Order

Order this close tolerance screw from our inventory online by visiting <https://military-fasteners.com/screws/close+tolerance+screws/NAS1580A3T2> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.